

# Product Data Sheet

## GW10677



CHORUSMART - Domestic range



Flush-mounting axial auxiliary module with one command. An axial push-buttons on the front; this product can be used in combination with the auxiliary wired inputs of the following devices of the Chorusmart range: connected commands, connected 1- channel On/Off actuator, connected movement sensors, EVO commands, or as a wired command for a connected 2-channel ZigBee interface. The module with 1 auxiliary axial command can also be used to directly command small resistive or weakly inductive loads such as ringers and buzzers (max. 10VA);. The device must be completed with one of the front buttons key available.

Description	1-channel auxiliary axial command	Power supply	100 ÷ 240 V ac - 50/60 Hz
No. modules	1	No. input channels	-
Local control	Via front push button (to complete with button key)	Auxiliary input channel voltage	-
Stocking temperature	-25 ÷ +70 °C	N. canali ingresso LED	1
Working temperature	-5 ÷ +45 °C	Tensione canali ingressi LED	100 ÷ 240 V ac - 50/60 Hz
Relative humidity (non-condensative)	Max 93%	No. output channels	1
Front light signaling	Blue led	Output contacts	1A (AC1)
Wiring terminals	With screw	240 V ac Incandescent-halogen lamps	-
Terminal tightening capacity stranded cables (mm <sup>2</sup> )	Max. 1,5	240 V ac LED lamps	-
Terminal tightening capacity solid cables (mm <sup>2</sup> )	Max. 1,5	Loads piloted from electronic transformers 240 V ac	-
Context	Interno, luoghi asciutti	240 V Fluorescent lamps	-
IP degree	IP20 (with button key)	Load control	-
Standard	2014/35/EU (LVD), 2011/65/EU + 2015/863 (RoHS), EN 60669-1, EN IEC 63000		

### DIMENSIONAL

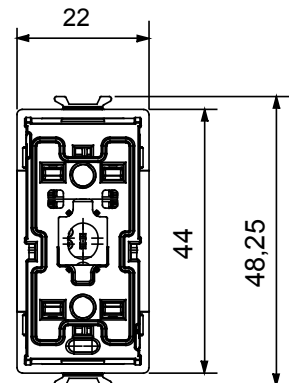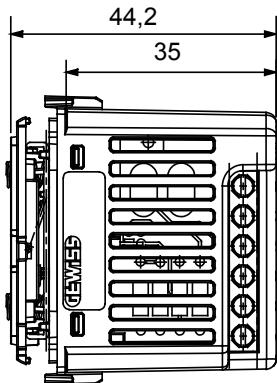

### TECHNICAL SYMBOLOGY

**IP**

IP20 (with button key)

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 20/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice