


SLI044005_RED


SLI044005_RED

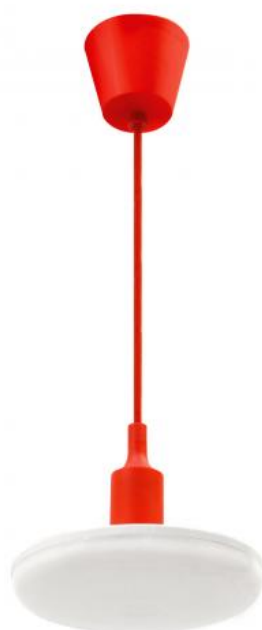

| | | | |
|--------------------|---------------|---------------------------|--------------|
| Power | 24 W | Voltage | 230 V |
| Colour temperature | 3000 K | Colour of light | WW |
| Beam angle | 120 ° | Degree of protection (IP) | IP20 |


Technical data

| | |
|------------------------------|--------------------------|
| Code | SLI044005_RED |
| Power | 24 W |
| Nominal current | 114 mA |
| Voltage | 230 V |
| Energy consumption | 27 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | II |
| Luminous flux** | 2000 lm (360°) |
| Lamp efficacy | 83 lm/W |
| Colour temperature | 3000 K |
| Colour of light | WW |
| Beam angle | 120 ° |
| RA | 80 |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | PC |
| Degree of protection (IP) | IP20 |
| Colour | Red |
| Dimension (AxBxC) | 190x93 (prEXTód 1000) mm |
| For use | Inside |
| Assembly method | Suspended |
| Application | INT |
| Made in | PRC |

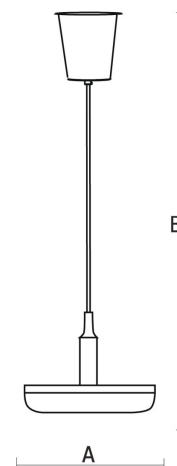

Related documents



 Declaration of Conformity