

BEV OL PF PKW K (750 200)

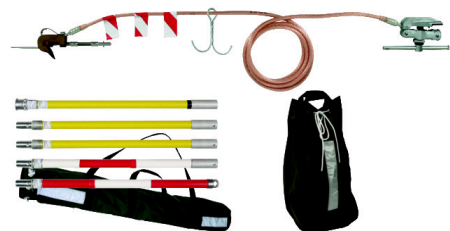


Figure without obligation

Figure without obligation

| Kit includes: | | |
|------------------------------|------------|-----------------|
| Type | Part No. | Pos. No. |
| Tommy bar (K) or ratchet (R) | | |
| EKV K H 50 12000 | 2x 751 121 | 1+4+8+11 |
| EST SQL RW 4855 TA | 1x 769 515 | 14 |
| STT 55 27 30 | 1x 785 111 | 17 |

| Type Part No. | BEV OL PF PKW K 750 200 |
|--|---------------------------------|
| Design | Tommy bar |
| Type of cable | Single-pole |
| Cable cross-section (phase side) | 50 mm ² |
| Cable cross-section (earth side) | 50 mm ² |
| Length (single-pole cable) | 12000 mm |
| Fully insulated | No |
| Standard | EN/IEC 61230 (DIN VDE 0683-100) |
| Max. short-circuit current I _k 0.06 s | 32.0 kA |
| DB drawing No. | 3 Ebgw 01.67 |
| Weight | 16,95 kg |
| Customs tariff number | 85359000 |
| GTIN | 4013364123830 |
| PU | 1 Stk |

¹⁾ Profile-free earthing means that the earthing cable can be suspended at the tower, thus allowing for limited diesel locomotive operation.

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.