


TOLEDO FLAT round

901498.002.76 | Surface mounted downlights



Surface mounted downlights
4051859096160
D 319, H 63

Ceiling mounting, Wall (surface)
white

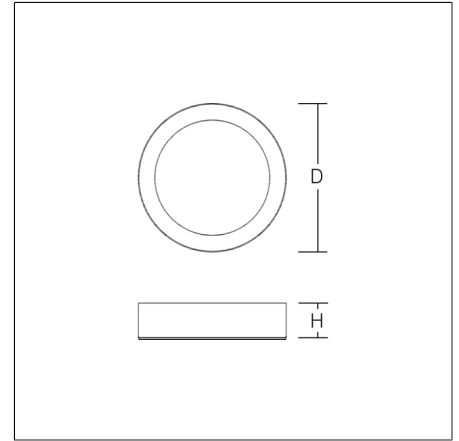


Ultra thin surface mounted downlight. Cylinder housing sheet steel, powder-coated. Bezel ring: die-cast aluminium, powder-coated. Light guide and diffuser made of non-yellowing PMMA, opal matt. Suitable for Ceiling mounting, Wall (surface). Driver integrated.

Product specifications

Diameter D	319 mm
Height H	63 mm
Weight	3.25 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2150 lm
System power	22 W
System efficiency	98 lm/W
Glare evaluation UGR (4H 8H)	25,5
Beam angle	107°
Rated life	50000 h (L80/B50)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 0 Hz, 50 - 60 Hz
Luminaires on B10A fuse	28
Luminaires on B16A fuse	47
Luminaires on C10A fuse	36
Luminaires on C16A fuse	56
Inrush current / Inrush current duration	50 A / 10 µs
CIE Flux Code / CEN Flux Code	49 80 96 100 100
Type of protection	IP 40
Protection class	II
Filament test	650°C - 30 seconds
Impact resistance	IK06
Ambient temperature	-20 °C ... + 35 °C
Conformity mark	CE, EAC

Accessories



982389.002
Mounting ring for fabric lampshades



983000.002
Anti-Glow Module