

MVS 1 4 8 TT (900 849)

- Allows compact interconnection of the arresters
- Suitable for installation in a TT system for a shock-proof connection of the neutral potential of the arresters

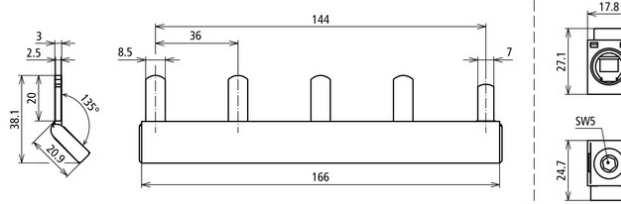
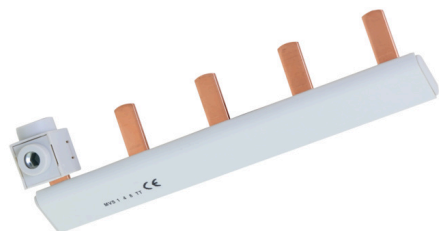


Figure without obligation

Modular wiring clip for TT systems, insulated, single-phase, four-pole with connection clamp up to 50 mm².

| | |
|--|--|
| Type | MVS 1 4 8 TT |
| Part No. | 900 849 <small>NEW</small> |
| Type | Single-phase |
| Number of contact studs | 4 |
| Dimensions | 166 x 38.1 x 22 mm |
| Material of the electrical conductor | E-Cu-ETP |
| Insulation material | PC |
| Cross-sectional area of the feed terminal | 10–50 mm (solid or stranded) / 6–35 mm ² (flexible with wire end ferrule) |
| Max. tightening torque of the clamping screw | 7 Nm |
| Insulated design | Yes |
| Screw width of clamping screw | Hexagon socket 5 |
| Weight | 118 g |
| Customs tariff number | 85369001 |
| GTIN | 4013364473348 |
| PU | 1 Stk |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.