

## EKV1+1 120 VG4GXHQ (VG4GXHQ)

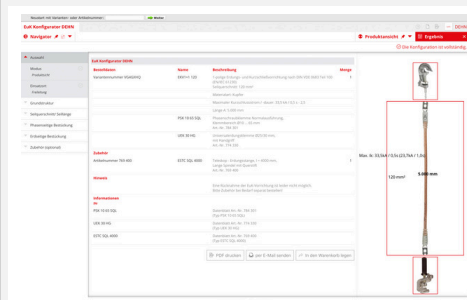


Figure without obligation

Type	EKV1+1 120 VG4GXHQ
Part No.	VG4GXHQ
Phase cable end	PSK 10 65 SQL
Earth cable end	UEK 30 HG
Clamping range Ø	10 ... 65 mm
Cable cross-section Cu	120 mm <sup>2</sup>
Max. short-circuit current I <sub>k</sub> 0.5 s	33.5 kA
Max. short-circuit current I <sub>k</sub> 1 s	23.7 kA
Standard	EN/IEC 61138 (DIN VDE 0283-3) and EN/IEC 61230 (DIN VDE 0683-100)
Temperature range	-25 °C ... +55 °C
Material (cable)	E-Cu, extra finely stranded and highly flexible
Material (sheath)	Thermoplastic (soft PVC compound YM2)
Weight	10 kg
Customs tariff number	85359000
GTIN	4013364165618
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.