


Classia

USB universal charger - 3000 mA - Type C+C
USB universal charger - 3000 mA - Type A+C

RW4286C2 - RA4286C2 - RG4286C2
RW4287C2 - RA4287C2 - RG4287C2



Use

For recharging portable devices such as phones, smartphones, tablets, MP3 or MP4 players, loudspeakers, watches, game consoles, powerbanks.
 Quick charge of one single electronic device up to 3000 mA or simultaneous charging of two devices up to 1500 mA.


Range

Designation	Item
USB charger TYPE A and C	<input type="checkbox"/> RW4287C2
	<input checked="" type="checkbox"/> RA4287C2
	<input checked="" type="checkbox"/> RG4287C2
USB charger TYPE C + C	<input type="checkbox"/> RW4286C2
	<input checked="" type="checkbox"/> RA4286C2
	<input checked="" type="checkbox"/> RG4286C2

Color code:

White colour Aluminum colour Black colour

Overall dimensions (mm)

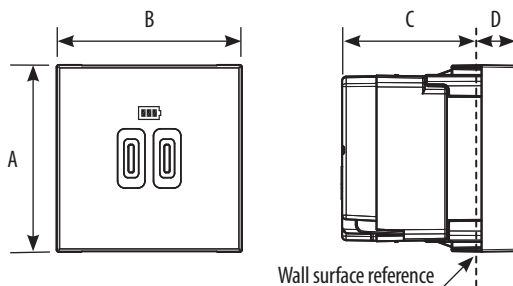

	A	B	C	D
..4186..	45.1	44.7	32.5	9.8
..4187..				

Connection

Terminal type: screw clamp
 Terminal capacity: 2 x 2,5 mm² max
 Stripping length: 6 mm
 Screwdriver: flat 3.5
 Compatible with flexible or rigid cables

Technical characteristics

- Protection index

(considering a complete installation, including cover plate)

Penetration by solid bodies/liquid: IP20D

- Mechanical characteristics

Impact test: IK 04

- Material characteristics

Material:

Case: PC (Polycarbonate)

Key cover: ABS - ABS/PC

Halogen free.

UV resistant.

Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place

650° C / 30 s for other parts made of insulating materials

- Climatic characteristics

Storage temperature: - 10° C to + 70° C

Use temperature: - 5° C to + 35° C

- Electrical characteristics

All values listed below are measured at an ambient temperature of + 25° and after 15 minutes of operation.

Nominal input voltage	100 - 240 V~
Nominal input frequency	50-60 Hz
Maximum input current	500 mA
Maximum power consumption in standby	0.1 W
Power average efficiency	81 %
Nominal output voltage	5 V ⁻⁻⁻
Maximum output current	3000 mA
Classe de consommation hors charge et niveau moyen d'efficacité: level VI*	
Safety-standard	EN 60950-1
Protection class	II - Low voltage

* NB: European Regulation No. 278/2009 of 6 April 2009, Directive 2005/32/EC on eco-design requirements for AC/DC power supplies

- Average charging time for devices equipped with lithium ion polymer batteries:

- 80 % charged < 1 h 15

- 100 % charged < 2 h 00

Cleaning

Clean the surface with a cloth.

Do not use acetone, tar-removing cleaning agents or trichloroethylene.

Caution: Always test before using special cleaning products.

Standards and approvals

IEC 60950-1: low voltage directive:

IEC 62684 / EN 50558 conform to the interoperability specifications of common external power supply (EPS) for use with mobile telephones.

Conform to eco design directive 2009/125/EC.