Lighting

PHILIPS



G ^A G

CorePro LEDspot Reflectors

CoreProLEDspot ND 3-40W R63 E27 827 36D

CorePro LEDspots Reflectors are a perfect fit for spot lighting and deliver warm halogen-like light. They are compatible with most existing fixtures with a GU10 or E27 base and are designed as a retrofit replacement for halogen or incandescent spots. CorePro LEDspots Reflectors deliver significant energy savings and minimize maintenance cost.

Product data

| General Information | |
|---------------------------------------|--------------------|
| Cap-Base | E27 |
| Nominal lifetime | 15,000 hour(s) |
| Switching Cycle | 50,000 |
| Lighting Technology | LED |
| Flux measurement reference | Narrow Cone |
| | |
| Light Technical | |
| Color Code | 827 [CCT of 2700K] |
| Beam Angle (Nom) | 36 degree(s) |
| Luminous Flux | 210 lm |
| Luminous Intensity (Nom) | 400 cd |
| Color Designation | Warm White (WW) |
| Correlated Color Temperature (Nom) | 2700 K |
| Luminous Efficacy (rated) (Nom) | 70.00 lm/W |
| Color Consistency | <6 |
| Color rendering index (CRI) | 80 |
| LLMF At End Of Nominal Lifetime (Nom) | 70 % |
| Luminous Flux in 90° Cone (Rated) | 210 lm |


| Operating and Electrical | |
|---------------------------|-------------|
| Line Frequency | 50 to 60 Hz |
| Input Frequency | 50 to 60 Hz |
| Power Consumption | 3 W |
| Lamp Current (Nom) | 23 mA |
| Wattage Equivalent | 40 W |
| Starting Time (Nom) | 0.1 s |
| Warm-up time to 60% light | 0.1 s |
| Power Factor (Fraction) | 0.5 |
| Voltage (Nom) | 220-240 V |
| | |
| Temperature | |
| T-Case Maximum (Nom) | 47 °C |
| | |
| Controls and Dimming | |
| Dimmable | No |
| | |
| Mechanical and Housing | |
| Bulb Finish | Clear |
| Bulb Shape | R63 |
| | |

CorePro LEDspot Reflectors

| Net Weight (Piece) | 0.094 kg |
|--|----------|
| | |
| Approval and Application | |
| Energy Efficiency Class | G |
| Suitable For Accent Lighting | Yes |
| Energy Consumption kWh/1000 h | 3 kWh |
| EPREL Registration Number | 397643 |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| EyeComfort | Yes |
| Flickering value (PstLM) - Flickering value as | 1 |
| per EN 61000-3-3 | |
| Stroboscopic effect visibility measure (SVM) | 0.4 |
| | |
| Application Conditions | |
| can it be used in closed luminaires | No |


| Product Data | | |
|---------------------------------|---------------------------------|--|
| Order product name | CoreProLEDspot ND 3-40W R63 E27 | |
| | 827 36D | |
| Full product name | CoreProLEDspot ND 3-40W R63 E27 | |
| | 827 36D | |
| Full product code | 871869681179500 | |
| Order code | 929001891302 | |
| Material Nr. (12NC) | 929001891302 | |
| Numerator - Quantity Per Pack | 1 | |
| EAN/UPC - Product/Case | 8718696811795 | |
| Numerator - Packs per outer box | 6 | |
| EAN/UPC - Case | 8718696811801 | |

Dimensional drawing




| Product | D | с |
|---|-------|--------|
| CoreProLEDspot ND 3-40W R63 E27 827 36D | 63 mm | 102 mm |

Photometric data

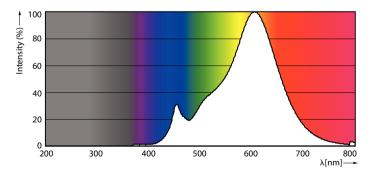


Spectral Power Distribution Colour - CoreProLEDspot ND 3-40W R63 E27 827 36D



Light Distribution Diagram - CoreProLEDspot ND 3-40W R63 E27 827 36D


CorePro LEDspot Reflectors

Photometric data



Accent Lighting Spots - CoreProLEDspot ND 3-40W R63 E27 827 36D

Lifetime

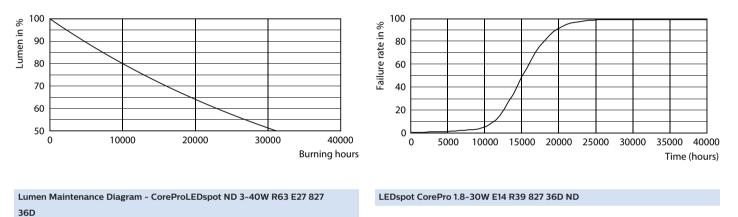



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2025, March 17 - data subject to change