

Product Data Sheet

DX10125R


FK Range



Light pliable conduits FK9 range, made of PVC, classification 22212, available in six diameters, from 16 to 50 mm, with or without cable puller, colour grey RAL 7035. Suitable for electrical and/or data transmission systems. Recommended for concealed installation in vertical walls or ceilings. The FK9 conduits comply with the standards EN 61386-1 and EN 61386-22.

| | | | |
|-------------------------------------|--|---|---|
| Colour | Grey RAL 7035 | Material | PVC |
| Type | with cable puller | Conduits Ø (mm) | 25 |
| Glow Wire Test | 960 °C | Resistance to compression | 2 (Light - 320 N) |
| Resistance to impact | 2 (Light - 320 N) | Resistance to bending | 2 (Pliable) |
| Electrical characteristics | 2 (With electrical insulating characteristics) | Protection against ingress of solid objects without accessories | 0 |
| Protection against ingress of water | 0 | Resistance against corrosion | Not applicable to plastic conduit systems |
| Fire resistance | 1 (Non-flame propagating) | Protection against ingress of solid objects with GF coupling | 4 |
| Standard | EN 61386-1 EN 61386-22 | Classification | 22212 |

DIMENSIONAL

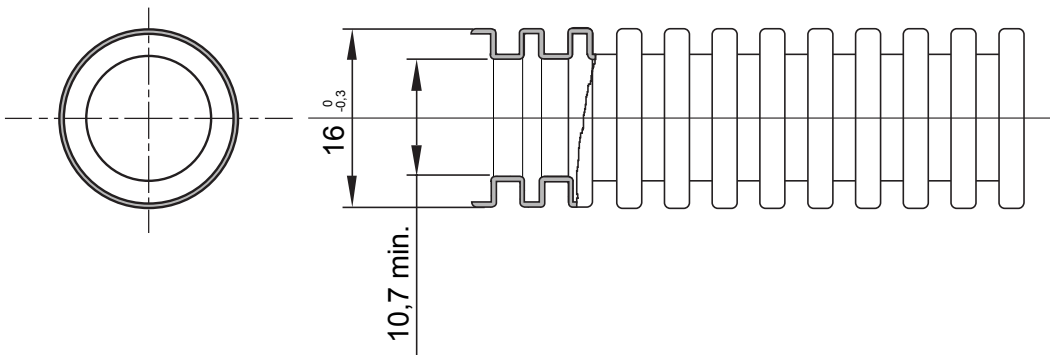

TECHNICAL SYMBOLOGY



960 °C

STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1
24069 Cenate Sotto - Bergamo - Italy
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com
sat@gewiss.com
Last update 20/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice