

Terminal rails

AK3 3/14 PE


AK3 3/14 PE

Terminal rails

Productnumber: 73385001

Base support with integrated PE terminal rail, for installation in AK small distribution board from AK Air distributors upwards from 14 to 70 modules as additional terminals or as a replacement part

Base carrier with PE terminal rail with 3 screw terminals 2.5-16mm² and 14 push-in terminals 0.75-4mm², suitable for mounting of 2 N-modules, for mounting in AK 14/28/42/56 small distribution boards

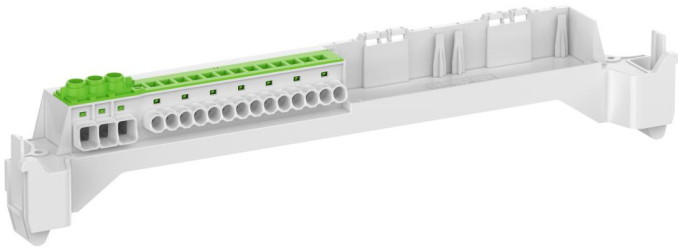

Technical Data

electrical characteristics

Rated operating voltage AC:	690 V
Rated current:	76 A
Number of poles:	1
shockproof:	Yes
Connection 1: Connection type:	Screws
Connection 1: Strip length:	13 mm
Connection 1: Clamping points per pole:	3
Connection 1: Suitable for Cu conductors:	1
Connection 1: Suitable for Al conductors:	0
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (min):	2.5 mm ²
Connection 1: Connectable conductor cross-section, fine-wire without ferrule (max):	16 mm ²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (min):	2.5 mm ²
Connection 1: Connectable conductor cross-section, fine-wire with ferrule (max):	16 mm ²
Connection 1: Connectable conductor cross-section, single-wire (min):	2.5 mm ²
Connection 1: Connectable conductor cross-section, single-wire (max):	16 mm ²
Connection 1: Connectable conductor cross-section, stranded (min):	2.5 mm ²
Connection 1: Connectable conductor cross-section, stranded (max):	16 mm ²
Connection 2: Connection type:	Screwless
Connection 2: Stripping length:	12 mm
Connection 2: Clamping points per pole:	14
Connection 2: Suitable for Cu conductors:	1
Connection 2: Suitable for Al conductors:	0
Connection 2: Connectable conductor cross-section, fine-wire without ferrule (min):	0.75 mm ²

electrical characteristics

Connection 2: Connectable conductor cross-section, fine-wire without ferrule (max):	4 mm ²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (min):	0.75 mm ²
Connection 2: Connectable conductor cross-section, fine-wire with ferrule (max):	2.5 mm ²
Connection 2: Connectable conductor cross-section, single-wire (min):	0.75 mm ²
Connection 2: Connectable conductor cross-section, single-wire (max):	4 mm ²

Dimensions

Weight:	0.118 kg
---------	----------

mechanical properties

Connection 1: Tightening moment:	2 Nm
----------------------------------	------

Sales Information

EAN:	4013902684502
Packing Unit Code:	C62
ETIM Class:	EC001284
Custom tariff number:	85369010

Material

Insulating body material:	Thermoplastic
---------------------------	---------------

Certificates

Test mark:	VDE
------------	-----