


Defender CCT IP65 Recessed Modular




- Clean air LED panel suitable for education, commercial and healthcare applications
- High quality steel housing with welded frame and secured by Easy Fix style brackets
- Selectable CCT between 3000K, 4000K and 6500K output
- Frame fitted with TP(a) rated diffuser providing excellent diffusion and outstanding light transmission
- Powered by Tridonic

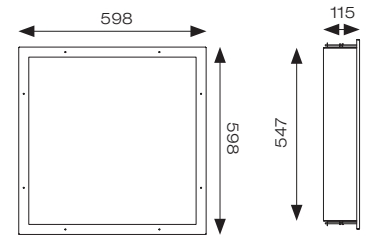

Powered by CASAMBI



Easy Fix style bracket



115mm depth

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-20°C to 50°C	L70 B50 54,000	Ra 80	4	110°	1	IP65	IK07

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
AELED	600 x 600 - CCT Selectable	20/33W	3000K/4000K/6500K	2820/4480lm (4000K)	141/135lm (4000K)	17	£247.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00
/SM3	Self-Test Emergency	+ £121.00
/DM3	DALI Emergency	+ £205.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/OCTO	OCTO Smart Control	+ £195.00