

# WLD+40003\_SMART

WLD+40003\_SMART

---




Power	<b>10 W</b>	Voltage	<b>48 V</b>
Colour temperature	<b>3000/4000/6000 K</b>	Colour of light	<b>CCT</b>
Beam angle	<b>24 °</b>	Degree of protection (IP)	<b>IP20</b>

---


## Technical data

Code	WLD+40003_SMART
Power	10 W
Nominal current	200 mA
Voltage	48 V
Energy consumption	10 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	950 lm (360°)
Luminous flux**	650 lm (360°)
Lamp efficacy	95 lm/W
Luminous intensity	2100 cd
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	24 °
RA	>90
Light source included	Yes
Uniformity of color SDCM max	5
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	44x157x178 mm
For use	Inside
Assembly method	NA SZYŃE
Application	Inside
Made in	PRC
Other	CCT/DIM ,

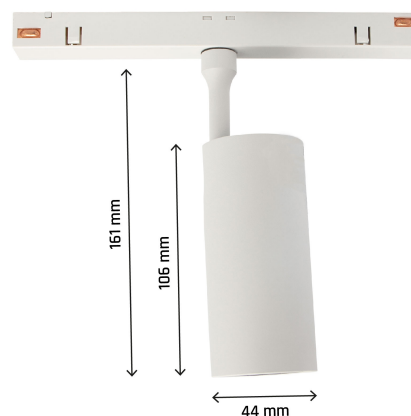


## Related documents



 User manual



 Declaration of Conformity

