


item number	w idth of cable tray A	thickness of metal sheet	w eight kg/m
<b>KZIN 60X50X0.75_S</b>	50	0,75	1,093
<b>KZIN 60X50X0.75_F</b>			1,473
<b>KZIN 60X75X0.75_S</b>	75	0,75	1,27
<b>KZIN 60X75X0.75_F</b>			1,705
<b>KZIN 60X100X0.75_S</b>	100	0,75	1,4
<b>KZIN 60X100X0.75_F</b>			1,71
<b>KZIN 60X150X0.75_S</b>	150	0,75	1,78
<b>KZIN 60X150X0.75_F</b>			2,183
<b>KZIN 60X200X0.75_S</b>	200	0,75	2,04
<b>KZIN 60X200X0.75_F</b>			2,502
<b>KZIN 60X300X0.75_S</b>	300	0,75	2,6
<b>KZIN 60X300X0.75_F</b>			3,189
<b>KZIN 60X400X1.00_S</b>	400	1,00	4,2
<b>KZIN 60X400X1.00_F</b>			4,906
<b>KZIN 60X500X1.25_S</b>	500	1,25	6,37
<b>KZIN 60X500X1.25_F</b>			7,552
<b>KZIN 60X600X1.25_S</b>	600	1,25	7,665
<b>KZIN 60X600X1.25_F</b>			8,738

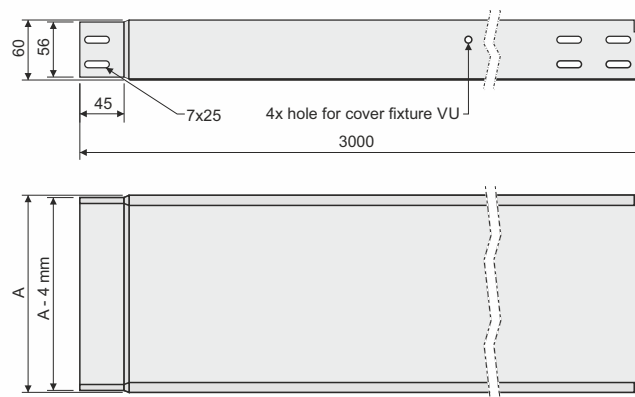

height of cable tray: 60 mm

length of cable tray: 3000 mm

product description: Cable tray is designed to create a cable route.  
 For securing the connection of the trays with the integrated coupling there are used the clamps made from spring steel KSV or the bolts NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish.  
 These items can also be ordered in a varnished version.


surface finish: S - Pre-Galvanized according to EN 10346, EN 10143, zinc-layer 15 - 27 µm  
 F - Hot Dip Galvanized according to ČSN EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: á 3 m

meets the requirements: EN 61537:02

storage: EN 60721-3-1

The graph show the maximum allowed even loading of the tray in relation to the distances of the supports.

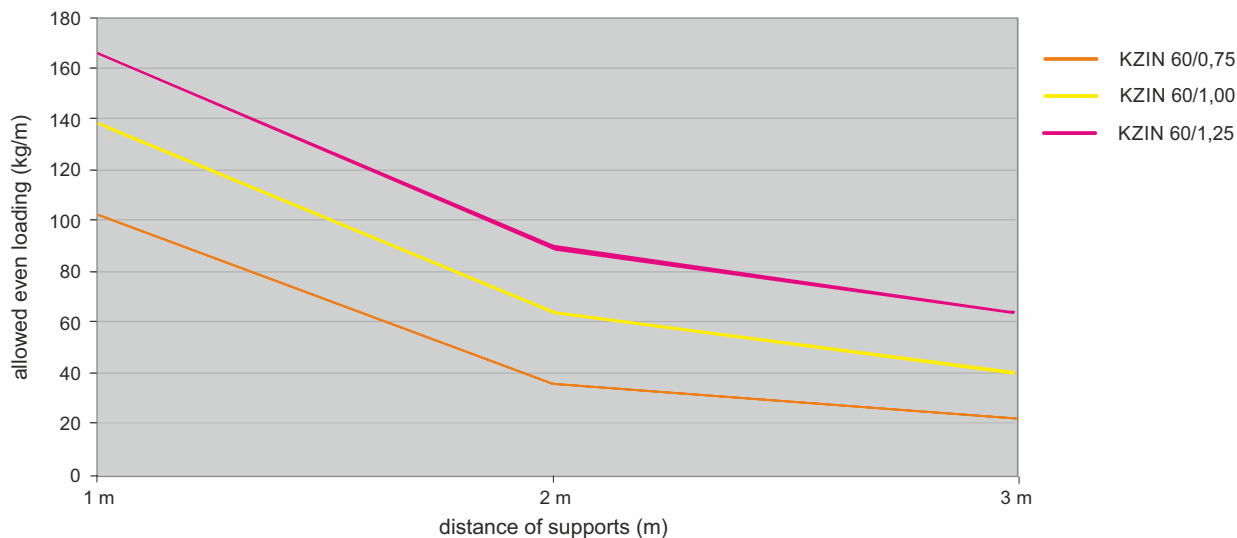

V povoleném zatížení nejsou zohledněny vnější vlivy a není možné je zatěžovat člověkem.

inner usable cross-section of the channel

	KZIN	60X50	60X75	60X100	60X150	60X200	60X300	60X400	60X500	60X600
cross-section (cm <sup>2</sup> )		30	45	60	90	120	180	240	300	360
CYKY 3X1,5	8,6	20	30	41	61	81	122	162	203	243
CYKY 5X1,5	10,1	15	22	29	44	59	88	118	147	176
CYKY 3X2,5	9,5	17	25	33	50	66	100	133	166	199
CYKY 5X2,5	11,2	12	18	24	36	48	72	96	120	143
CYKY 3X4	11,2	12	18	24	36	48	72	96	120	143
CYKY 5X4	13,8	8	12	16	24	32	47	63	79	95
CYKY 5X6	15,1	7	10	13	20	26	39	53	66	79
CYKY 5X10	18	5	7	9	14	19	28	37	46	56
CYKY 5X16	20,4	4	5	7	11	14	22	29	36	43
CYKY 5X25	26,1	2	3	4	7	9	13	18	22	26
CYKY 4X35	24,8	2	4	5	7	10	15	20	24	29
CYKY 4X50	31,3	2	2	3	5	6	9	12	15	18
CYKY 3X70+50	33,6	1	2	3	4	5	8	11	13	16
CYKY 3X95+70	39,3	1	1	2	3	4	6	8	10	12
CYKY 3X120+95	43	0	1	2	2	3	5	6	8	10
CYKY 3X240+120	56,4	0	1	1	1	2	3	4	5	6

The values state the number of cables with the tray at 50% full. Orientation diameters of the cables CYKY. The values are mathematically calculated. The limit values (small tray x big cable or contrariwise) it is necessary to consider combination of the tray and diameter of the cable and used them with reference to technical conditions.