

52005470	<b>DATA SHEET</b>	
Valid from: 03.07.2018	<b>SKINDICHT® SVFK</b>	

The SKINDICHT® SVFK, a flat cable gland made of plastic for universal use. The lateral sealing lips fit around various cable dimensions, so that with only one seal for each PG-size, flat cables of different outside dimensions can be sealed.



### Components:

Gland body	Polystyrene
Pressure screw	Polystyrene
Pressure washers	Steel, zinc-plated
Sealing insert	CR

### Technical features:



Connecting thread	PG16 up to PG48 acc. to DIN 40430
Protection class	IP54 acc. to EN 60529
Temperature range	-20 °C up to +60 °C
Colour	RAL 7035

### Norm references:



Creator: T. Dvoulety /PDP Released: DAMU1/PDP	Document: DB52005470EN Version: 03	Page 1 of 2
--------------------------------------------------	---------------------------------------	-------------

52005470	<b>DATA SHEET</b>	
Valid from: 03.07.2018	<b>SKINDICHT® SVFK</b>	

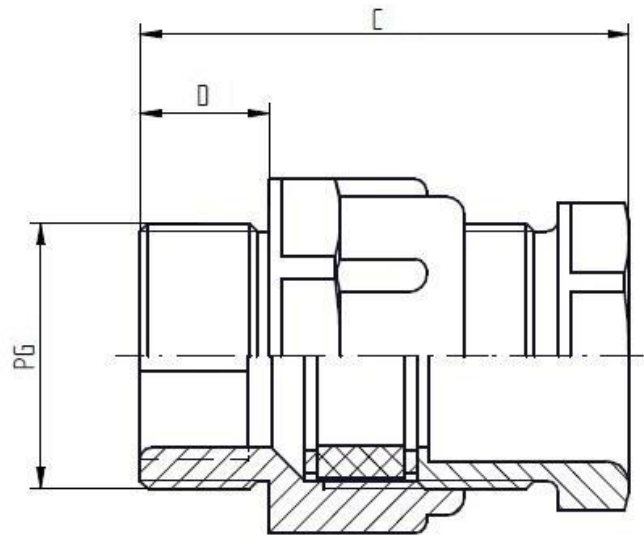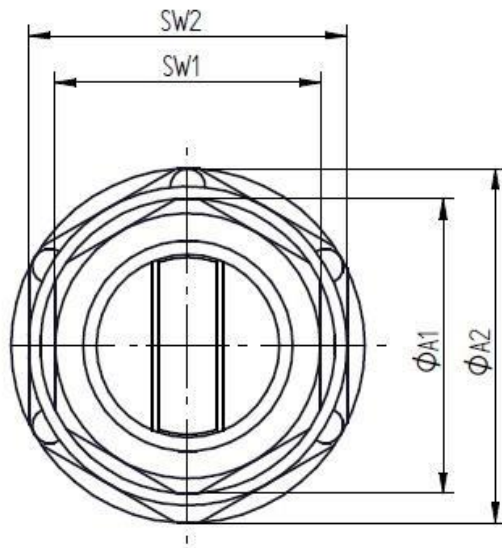

PG	SW1 [mm]	Ø A1 [mm]	SW2 [mm]	Ø A2 [mm]	C [mm] max.	D [mm]	Flat cable width [mm] min.-max.	Flat cable thickness [mm] min.-max.	Article No.
PG16	23	26,0	27	29,5	39,5	11	-- 15	-- 5	52005470
PG21	30	33,8	33	37,5	47,5	11	10 - 20,5	3 - 8	52005680
PG29	40	44,8	42	47,5	49,5	12	15 - 27	4 - 11,5	52005690
PG36	50	56,5	53	60,0	52,5	12	25 - 34	4 - 11,5	52005700
PG42	55	61,5	60	68,0	58,0	13	30 - 40	5 - 12	52005710
PG48	60	67,5	65	74,0	59,0	14	35 - 45	5 - 12	52005720

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

Creator: T. Dvoulety /PDP Released: DAMU1/PDP	Document: DB52005470EN Version: 03	Page 2 of 2
--------------------------------------------------	---------------------------------------	-------------