

WLD+40033_SMART


WLD+40033_SMART



| | | | |
|--------------------|-------------------------|---------------------------|-------------|
| Power | 5 W | Voltage | 48 V |
| Colour temperature | 3000/4000/6000 K | Colour of light | CCT |
| Beam angle | 165 ° | Degree of protection (IP) | IP20 |


Technical data

| | |
|------------------------------|------------------|
| Code | WLD+40033_SMART |
| Power | 5 W |
| Nominal current | 100 mA |
| Voltage | 48 V |
| Energy consumption | 5 kWh/1000h |
| Frequency | DC Hz |
| Protection class | III |
| Power factor | 1 |
| Useful luminous flux* | 400 lm (360°) |
| Luminous flux** | 300 lm (360°) |
| Lamp efficacy | 80 lm/W |
| Colour temperature | 3000/4000/6000 K |
| Colour of light | CCT |
| Beam angle | 165 ° |
| RA | >90 |
| Light source included | Yes |
| Uniformity of color SDCM max | 5 |
| Working temperature range | -20 to +40 ° |
| Lifespan | 50000 h |
| Housing material | AL+PC |
| Degree of protection (IP) | IP20 |
| Colour | White |
| Dimension (AxBxC) | 100x130 mm |
| For use | Inside |
| Assembly method | NA SZYNE |
| Application | Inside |
| Made in | PRC |
| Other | CCT/DIM , |

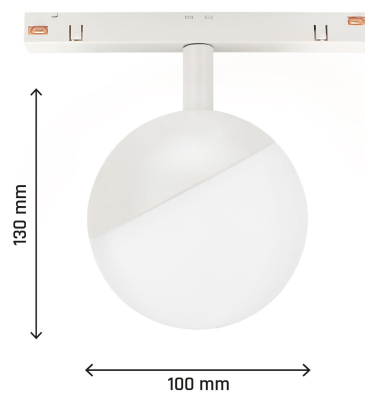


Related documents



 User manual



 Declaration of Conformity

