


DLH DG 8 H20 L169 WS V2A (206 359)



Figure without obligation

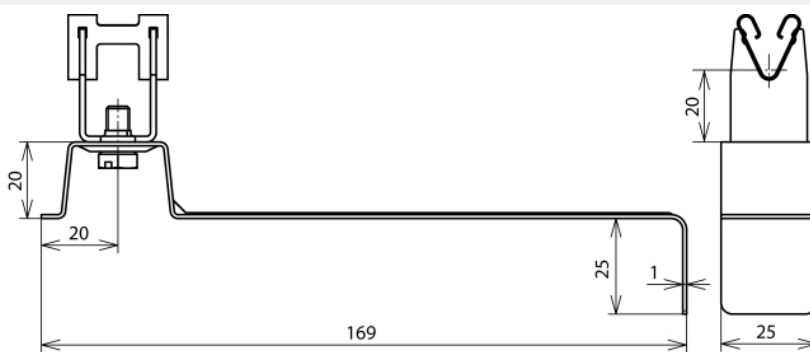

| Type | DLH DG 8 H20 L169 WS V2A |
|-----------------------------------|---------------------------------|
| Part No. | 206 359 |
| Material of roof conductor holder | StSt |
| Length of brace (l1) | 169 mm |
| Height of conductor holder | 20 mm |
| Material of conductor holder | StSt |
| Conductor support Rd | 8 mm |
| Type of roofing | tiled roofs |
| Fixing possibility | for hooking at the roof battens |
| Type of conductor holder | DEHNgrip |
| Conductor routing | loose |
| Female thread | M6 |
| Standard | EN 62561-4 |
| Weight | 65 g |
| Customs tariff number | 85389099 |
| GTIN | 4013364047723 |
| PU | 50 Stk |

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.