



TL-D Standard Colours

TL-D 1m 36W/33-640 1SL

Low-pressure mercury discharge lamps with a tubular 26 mm envelope

Product data

• Product Data

Order code	928045603314
Full product code	928045603314
Full product name	TL-D 1m 36W/33-640 1SL
Order product name	TL-D 1m 36W/33-640 1SL/25
Pieces per pack	1
Packing configuration	25
Packs per outerbox	25
Bar code on pack - EAN1	8711500702883
Bar code on outerbox - EAN3	8711500726575
Logistic code(s) - 12NC	928045603314
ILCOS code	FD-36/41/2B-E-G13
Net weight per piece	120.000 gr

• General Characteristics

Cap-Base	G13 [Medium Bi-Pin Fluorescent]
Bulb	T8 [26 mm]
Life to 50% failures EM	13000 hr
Life to 10% failures EM	10000 hr

• Electrical Characteristics

Lamp Wattage	36 W
Lamp Wattage EM	36.0 W
Lamp Voltage	80 V
Lamp Current EM	0.560 A
Dimmable	Yes

• Environmental Characteristics

Energy Efficiency Label (EEL)	B
Mercury (Hg) Content	8.0 mg

• Light Technical Characteristics

Color Code	33-640
Color Rendering Index	63 Ra8
Color Designation (text)	Cool White
Color Temperature	4100 K
Chromaticity Coordinate X	377 -
Chromaticity Coordinate Y	381 -
Luminous Flux Lamp EM	2800 Lm
Lumen Maintenance 2000h	90 %
Lumen Maintenance 5000h	80 %
Lumen Maintenance 10000h	75 %
Lumen Maintenance 15000h	70 %
Luminance Average EM	1.20 cd/cm ²

• Product Dimensions

Base Face to Base Face A	970.0 mm
Insertion Length B	974.7 (min), 977.1 (max) mm
Overall Length C	984.2 mm


PHILIPS

sense and simplicity


TL-D Standard Colours

Diameter D 28 mm



Dimensional drawing



Product	A (Max)	B (Min)	B (Max)	C (Max)	D (Max)
TL-D 1m 36W/33-640	970.0	974.7	977.1	984.2	28



Photometric data

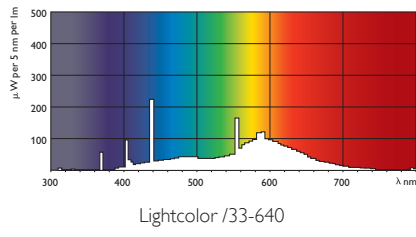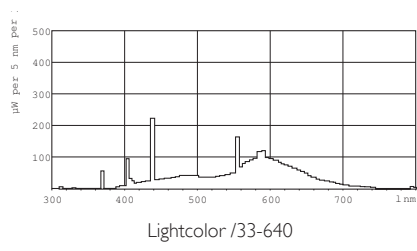

© 2011 Koninklijke Philips Electronics N.V.
All rights reserved.

Specifications are subject to change without notice. Trademarks are the property of Koninklijke Philips Electronics N.V. or their respective owners.

www.philips.com/lighting

2011, March 15
data subject to change