

SYSTEM SHIFT - GRID L

WLD+40042



See
more


On track luminaire SYSTEM SHIFT - GRID L, with a power of 22 W, high light efficacy 102 lm/W. It is made of high-quality components, supported by a 5-year warranty. It also stands out for its very high colour rendering index RA>90. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Narrow beam angle 35° gives directional light so that selected objects or surfaces can be better exposed. Designed to be mounted on a track.



Power	22 W	Voltage	48 V
Colour temperature	3000 K	Colour of light	WW
Beam angle	35 °	UGR	<19
Degree of protection (IP)	IP20		


Technical data

Code	WLD+40042
Power	22 W
Nominal current	450 mA
Voltage	48 V
Energy consumption	22 kWh/1000h
Frequency	DC Hz
Protection class	III
Power factor	1
Useful luminous flux*	2250 lm (360°)
Luminous flux**	1550 lm (360°)
Lamp efficacy	102 lm/W
Luminous intensity	4600 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	35 °
UGR	<19
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	404x23x42 mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC

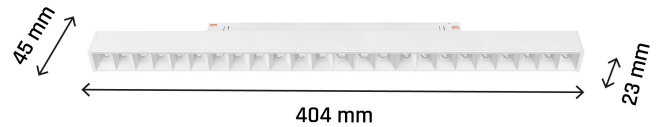


Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

