


# FLAT POLYMERO

311555.002.8.76 | Ceiling and wall luminaires



Ceiling and wall luminaires  
4051859082361  
D 515, H 150

Ceiling mounting, Wall (surface)  
white

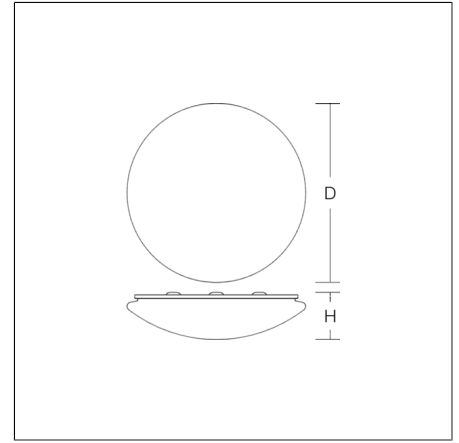

Decorative round surface-mounted luminaire. Base: metal, powder-coated. Diffuser made of plastic (polycarbonate), opal, shockproof. Diffuser fastening: patented push system. Suitable for Ceiling mounting, Wall (surface).

## Product specifications

Diameter D	515 mm
Height H	150 mm
Weight	2.85 kg
Light source	LED
Colour temperature	3000 K
Rated luminous flux	2650 lm
System power	24 W
System efficiency	110 lm/W
Glare evaluation UGR (4H 8H)	19,1
Beam angle	down 117° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	80
Colour tolerance	4
Photobiological safety according to EN 62471	Risk group 0
Driver	Converter, dimmable
Control	DALI
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	9
Luminaires on B16A fuse	14
Inrush current / Inrush current duration	30 A / 220 µs
CIE Flux Code / CEN Flux Code	42 70 89 87 100
Type of protection	IP 40
Protection class	I
Filament test	850°C - 30 seconds
Impact resistance	IK10
Ambient temperature	25 °C
Conformity mark	CE, EAC

## Accessories



981806.002  
Decorative ring, white



981806.004  
Decorative ring, silver


# FLAT POLYMERO

311555.002.8.76 | Ceiling and wall luminaires



981806.0042  
Decorative ring, nickel

## Spareparts



08-311170.032  
Replacement diffuser