

# SLI037027NW\_PW

SLI037027NW\_PW


IK06



Power	<b>6 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>750 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>110 °</b>
IK	<b>06</b>	Degree of protection (IP)	<b>IP20</b>


## Technical data

Code	SLI037027NW_PW
Power	6 W
Nominal current	48 mA
Voltage	230 V
Energy consumption	6 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	Yes
Power factor	0,5
Useful luminous flux*	750 lm (360°)
Luminous flux**	550 lm (360°)
Lamp efficacy	122 lm/W
Luminous intensity	220 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	110 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20 to +40 °
Lifespan	17000 h
Housing material	PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	115x35 mm
Mounting hole	95 mm
For use	Inside
Assembly method	On the ceiling, Recessed
Application	Inside
Made in	PRC

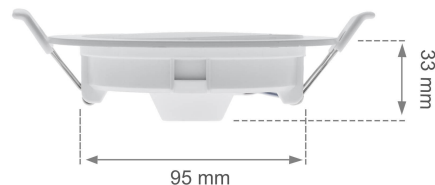


## Related documents




 User manual



 Declaration of Conformity



 3D model

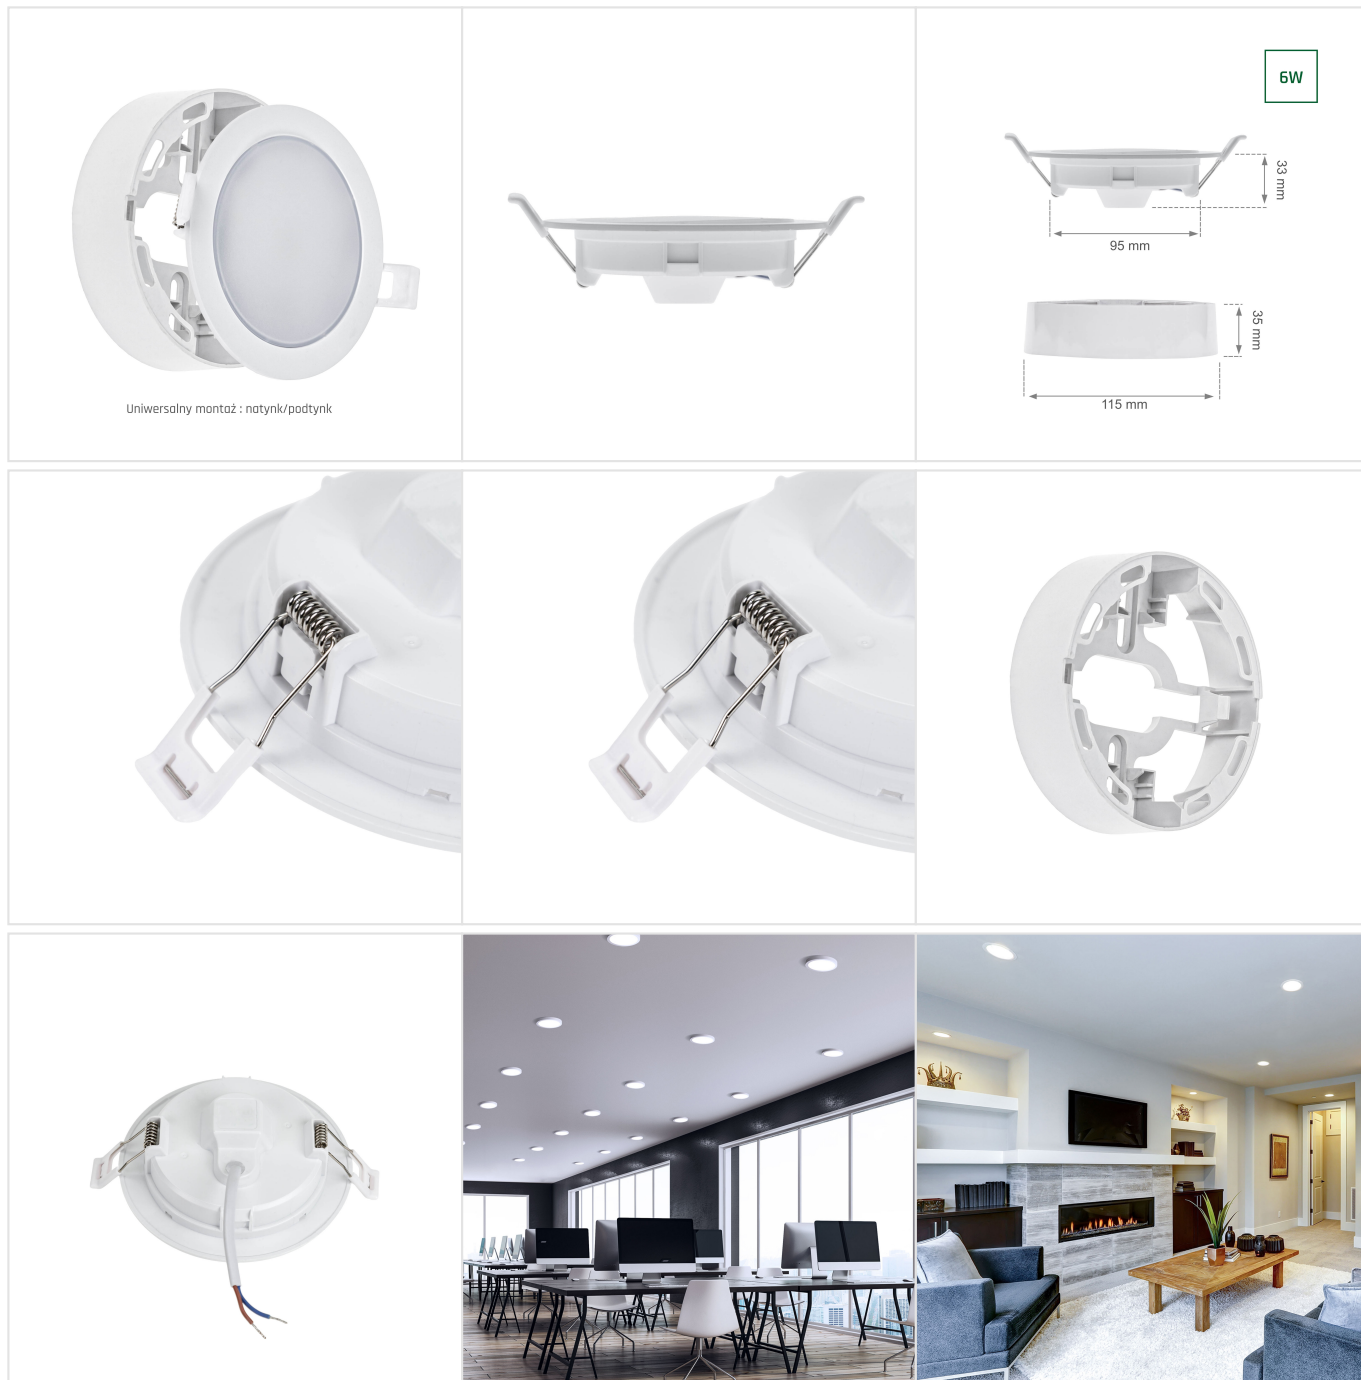

Uniwersalny montaż : natynk/podtynk

6W

33 mm  
95 mm  
36 mm  
115 mm