



MASTER - LED HID SON-T - Ultra Efficient

MAS LED SON-T UE M 3.6Klm 19W 727 E27

Philips MASTER - LED HID SON-T Ultra Efficient lamps are an easy LED solution with the highest efficiency to replace High-Intensity Discharge (HID) and High-Pressure Sodium (SON) lamps. MASTER – LED HID SON-T UE solutions bring the energy efficiency and long lifetime benefits of LED to HID replacement, providing instant savings for low energy costs. With the right lamp size and light distribution, you can easily use MASTER – LED HID SON-T UE lamps into existing SON and SON-T systems, enhancing the lighting quality with LED by removing the luminaire's ballast for direct Mains working, gaining additional savings.

Warnings and Safety

- Installation should always be performed by a qualified electrician or installer. Use the installation guide for instructions.


Product data

General Information			
Cap-Base	E27	Luminous Flux	3,600 lm
Nominal lifetime	50,000 hour(s)	Color Designation	Warm White (WW)
Switching Cycle	50,000	Correlated Color Temperature (Nom)	2700 K
Lighting Technology	LED	Luminous Efficacy (rated) (Nom)	189 lm/W
Flux measurement reference	Sphere	Color Consistency	<6
Value ladder	Performance	Color rendering index (CRI)	70
		LLMF At End Of Nominal Lifetime (Nom)	70 %
		Photobiological safety according to EN 62471	RG1
Light Technical		Operating and Electrical	
Color Code	727 [CCT of 2700K]	Line Frequency	50 to 60 Hz
Beam Angle (Nom)	300 degree(s)		

MASTER - LED HID SON-T - Ultra Efficient

Input Frequency	50 to 60 Hz
Power Consumption	19 W
Lamp Current (Nom)	89 mA
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.9
Voltage (Nom)	220-240 V
Ballast Compatibility	Mains
Inrush current at mains	29.7
Max. lamp no. on MCB B type 10A - Mains	7
Max. lamp no. on MCB B type 10A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 10A – EM ballast with Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A - Mains	12
Max. lamp no. on MCB B type 16A – EM ballast without Compensation Capacitor.	-
Max. lamp no. on MCB B type 16A – EM ballast with Compensation Capacitor.	-
Temperature	
T-Case Maximum (Nom)	39.56 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Bulb Finish	Clear

Dimensional drawing





Bulb Shape	T46
Net Weight (Piece)	0.148 kg
Approval and Application	
Energy Efficiency Class	B
Energy Consumption kWh/1000 h	19 kWh
EPREL Registration Number	2096240
CE mark	Yes
EU RoHS compliant	Yes
Flickering value (PstLM) - Flickering value as per EN 61000-3-3	1
Stroboscopic effect visibility measure (SVM)	2
Ambient temperature range	-30 to +45 °C

Product Data	
Order product name	MAS LED SON-T UE M 3.6Klm 19W 727 E27
Full product name	MAS LED SON-T UE M 3.6Klm 19W 727 E27
Full product code	872016924029200
Order code	929003677102
Material Nr. (12NC)	929003677102
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8720169240292
Numerator - Packs per outer box	6
EAN/UPC - Case	8720169240308

Product	D	C
MAS LED SON-T UE M 3.6Klm 19W 727 E27	47 mm	227 mm


MASTER - LED HID SON-T - Ultra Efficient

Photometric data

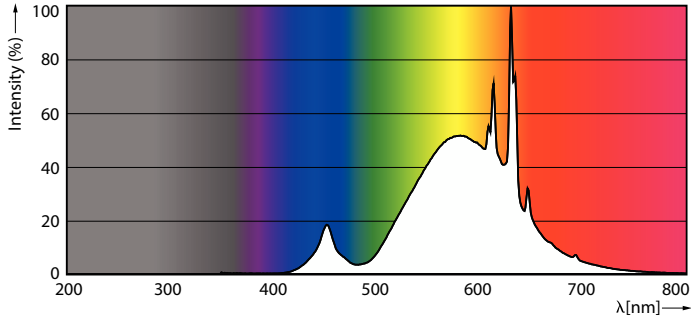


Spectral Power Distribution Colour - MAS LED SON-T UE M 3.6Klm 19W 727 E27

General uniform lighting - MAS LED SON-T UE M 3.6Klm 19W 727 E27




Light Distribution Diagram - MAS LED SON-T UE M 3.6Klm 19W 727 E27

Lifetime

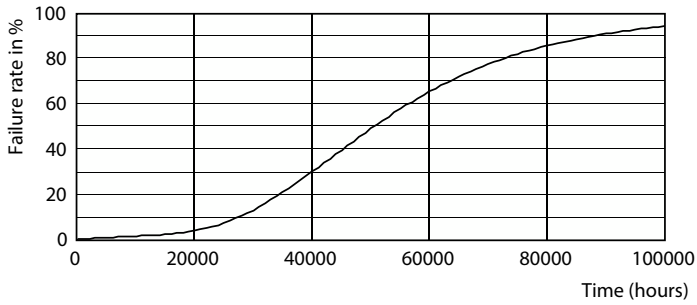

Life Expectancy Diagram

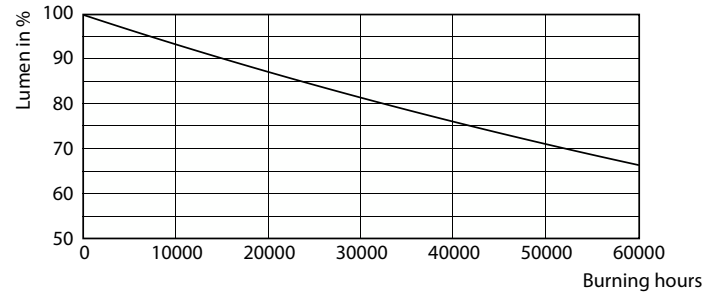

Lumen Maintenance Diagram - MAS LED SON-T UE M 3.6Klm 19W 727 E27

MASTER - LED HID SON-T - Ultra Efficient

