


Basic control devices
Electronic pushbuttons



1. USE

Electronic pushbutton control device for lighting and other control.


2. RANGE

Designation	Cat. No.
Pushbutton sweet click 1 P (NO) - 2 A - 250 VAC Built-in-led	<input type="checkbox"/> HD4045 <input type="checkbox"/> HC4045 <input type="checkbox"/> HS4045

Color code:

- White
- Tech
- Anthracite

3. OVERALL DIMENSIONS (mm)

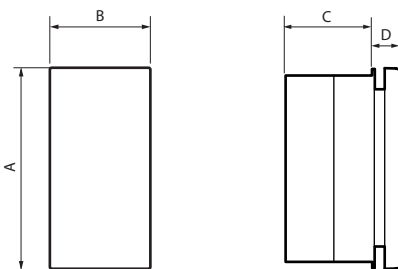

	A	B	C	D
1 module	45	22.5	26.5	9.5

4. CONNECTION

Stripping length (rigid or flexible cables): 9 mm
Terminals with screws

5. TECHNICAL CHARACTERISTICS

■ **5.1 Protection index**

Penetration by solid bodies/liquid: IP 21 D
Impact test: IK 04

■ **5.2 Material characteristics**

Material: PC for mechanism case
PC for key cover

Colour: White, Tech, Anthracite

Halogen free.

UV resistant.

Self-extinguishing:

- 850° C / 30 s for insulating parts holding live parts in place.
- 650° C / 30 s for other parts made of insulating materials.

■ **5.3 Electrical characteristics**

Voltage: 250 VAC

Current: 2 A

■ **5.4 Climatic characteristics**

Storage and operating temperatures: - 5° C to + 35° C

6. CLEANING

Surface cleaning with a cloth.

Do not use: acetone, tar remover, trichloroethylene.

7. STANDARDS AND APPROVALS

Compliance with standards of installation and manufacturing.

Refer to e.catalogue.