







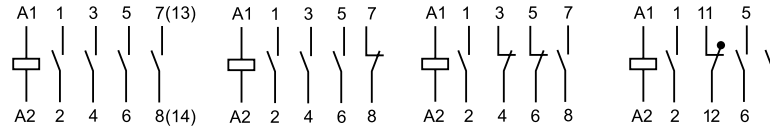



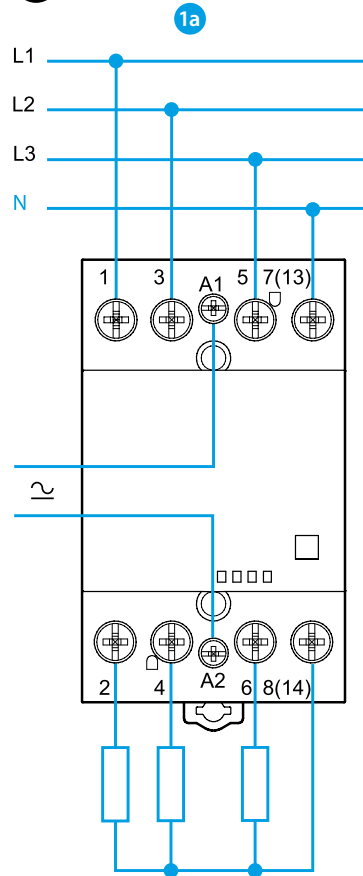


22.44


22.64

	22.44.0.xxx.4x10 U_N [12 - 24 - 110...120 (110 V DC) - 230...240 (220 V DC)] V AC (50/60 Hz) / DC $U_{min} - U_{max}$ (0.85...1.1) U_N P 5 VA (50 Hz) / 5 W	
		
40 A 440 V AC (EN 61095: 2009 - EN 60947-4-1: 2009)		
	22.44	22.64
	AC1 / AC-7a (400 V) 16000 VA AC3 / AC-7b (400 V) 22 A DC1 (30/110/220)V (40/4/1.2) A  (400 - 440 V AC) 11 kW	AC1 / AC-7a (400 V) 24000 VA AC3 / AC-7b (400 V) 30 A DC1 (30/110/220)V (63/4/1.2) A  (400 - 440 V AC) 15 kW
	 4000 W  1500 W CFL-LED 1000 W	 5000 W  2000 W CFL-LED 1500 W
	$-15...+55^{\circ}\text{C}$ [$-25...+55^{\circ}\text{C}$ - 22.44.0.xxx.4310]	
IP20		


1




1b

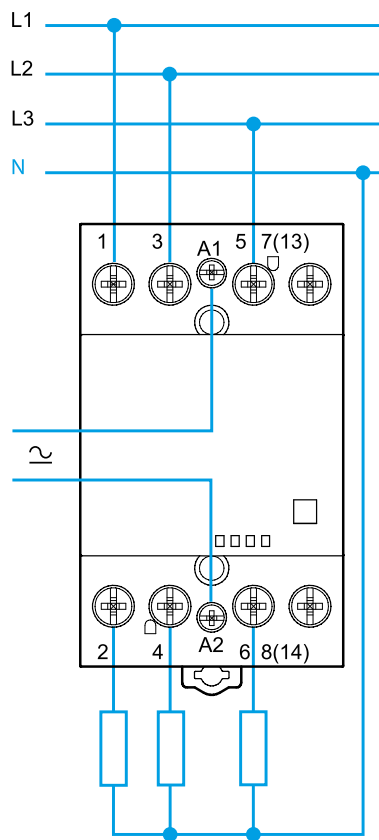

1c


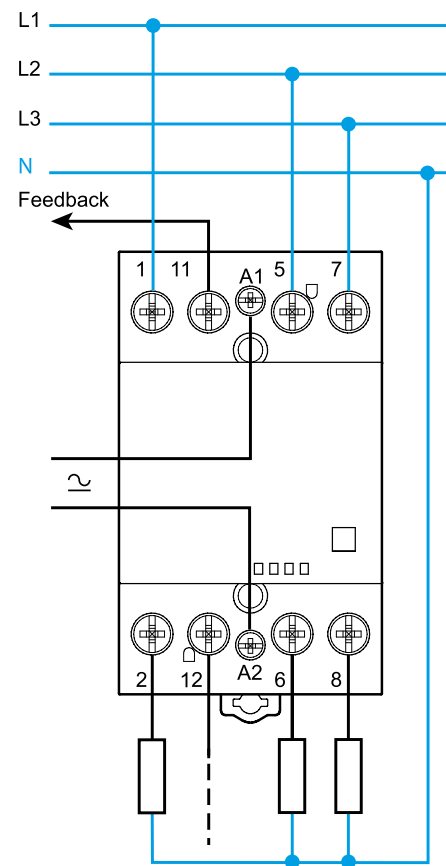



2

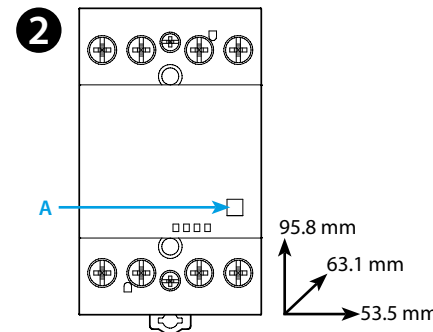

22.44 + (022.63 / 022.65)

3

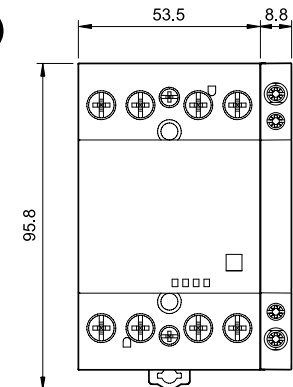

	022.63	2 NO (DPST-NO)
	022.65	1 NO (SPST-NO) + 1 NC (SPST-NC)
		AC1 6 A AC15 (230 V AC) 700 VA

ENGLISH

22.x4 MODULAR CONTACTORS 40 A
 Compliant with EN 61095:2009 and with EN 60947-4-1: 2009

1 CONNECTION DIAGRAM

- 1a Line and neutral switched
- 1b Line only switched
- 1c Example of application of contactor with Mirror Contacts*

2 FRONT VIEW

- A Mechanical indicator

3 ACCESSORIES

Auxiliary contact module available (022.63/022.65) for "Quick assembly" to the main contactor

NOTE

- The maximum ambient temperature for 3 adjacent contactors is +40°C. Where more than 3 contactors are installed, it is necessary to interpose an air gap of 9 mm between each group of three contactors
- The maximum ambient temperature for 2 adjacent contactors is +55°C. Where more than 2 contactors are installed, it is necessary to interpose an air gap of 9 mm between each group of two contactors
- Operate/release time: (20/45) ms

* (4717): Mirror contact: EN60947-4-1
 Normally closed contact is definitely in open position if the normally open contact is closed