





MASTER UltraEfficient LED candles and lusters

MAS LEDLusterND2.3-40W E27 840 P45CL GUE

This is the most efficient LED candle from Philips brand. 210lm/W helps to concrete the company statement of sustainability. 50000 hour lifetime helps to extend the replacement cycle to reduce the waste. This is not only the high SPEC product, but also keep the light quality of Philips brand

Product data

General Information		
Cap-Base	E27	
Nominal lifetime	50,000 hour(s)	
Switching Cycle	50,000	
Lighting Technology	LED	
Flux measurement reference	Sphere	
Light Technical		
Color Code	840 [CCT of 4000K]	
Luminous Flux	485 lm	
Color Designation	Cool White (CW)	
Correlated Color Temperature (Nom)	4000 K	
Luminous Efficacy (rated) (Nom)	210 lm/W	
Color Consistency	<6	
Color rendering index (CRI)	80	
LLMF At End Of Nominal Lifetime (Nom)	70 %	
Photobiological safety according to EN 62471 RG1		

Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	2.3 W
Lamp Current (Nom)	25 mA
Wattage Equivalent	40 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.4
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	70 ℃
Controls and Dimming	
Dimmable	No


Datasheet, 2025, March 17 data subject to change

MASTER UltraEfficient LED candles and lusters

Mechanical and Housing	
Bulb Finish	Clear
Bulb Material	Glass
Bulb Shape	P45
Net Weight (Piece)	0.014 kg
Approval and Application	
Energy Efficiency Class	А
Energy Consumption kWh/1000 h	3 kWh
EPREL Registration Number	1442637
Photobiological risk	Photobiological risk group 1 @ 200mm to
	EN62471
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Ambient temperature range	-20 to +45 °C


No
MAS LEDLusterND2.3-40W E27 840
P45CL GUE
MAS LEDLusterND2.3-40W E27 840
P45CL GUE
872016918905800
929003626502
929003626502
1
8720169189058
10
8720169189065

Dimensional drawing




Product	D	С
MAS LEDLusterND2.3-40W E27 840 P45CL GUE	45 mm	78 mm

Photometric data








Light Distribution Diagram - MAS LEDLusterND2.3-40W E27 840 P45CL GUE


MASTER UltraEfficient LED candles and lusters


Photometric data

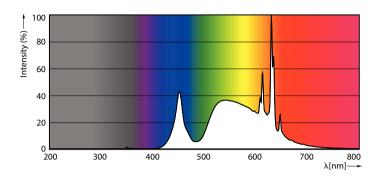

Spectral Power Distribution Colour - MAS LEDLusterND2.3-40W E27 840 P45CL GUE

Lifetime

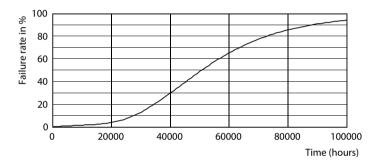

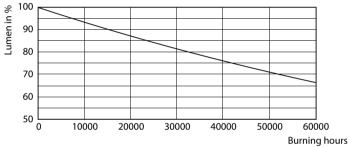

Life Expectancy Diagram

Lumen Maintenance Diagram - MAS LEDLusterND2.3-40W E27 840 P45CL



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.