Lighting

PHILIPS



Corepro Glass High Lumen bulbs

CorePro LEDBulbND 120W E27 A67 840 FR G

Featuring a classic heritage design, these filament CorePro LED bulbs combine the familiar shapes of classic incandescent bulbs with the benefits of the long-lasting LED technology. A very easy choice for people who are looking for a retrofit LED replacement, these high lumen LED bulbs provide 90% energy savings compared with conventional light bulbs. CorePro LED High Lumen bulbs provide excellent quality of light. Energy-saving LED lighting that offers a lifetime of 15,000 hours to reduce maintenance costs.

Product data

General Information	
Cap-Base	E27
Nominal lifetime	15,000 hour(s)
Switching Cycle	20,000
Lighting Technology	LED
Light Technical	
Color Code	840 [CCT of 4000K]
Beam Angle (Nom)	300 degree(s)
Luminous Flux	2,000 lm
Color Designation	Cool White (CW)
Correlated Color Temperature (Nom)	4000 K
Luminous Efficacy (rated) (Nom)	153.00 lm/W
Color Consistency	<6
Color rendering index (CRI)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Photobiological safety according to EN 62471	RG1


Operating and Electrical	
Line Frequency	50 to 60 Hz
Input Frequency	50 to 60 Hz
Power Consumption	13 W
Lamp Current (Nom)	120 mA
Wattage Equivalent	120 W
Starting Time (Nom)	0.5 s
Warm-up time to 60% light	0.5 s
Power Factor (Fraction)	0.51
Voltage (Nom)	220-240 V
Temperature	
T-Case Maximum (Nom)	60 °C
Controls and Dimming	
Dimmable	No

Corepro Glass High Lumen bulbs

Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	A67
Net Weight (Piece)	0.040 kg
Approval and Application	
Energy Efficiency Class	D
Energy Consumption kWh/1000 h	13 kWh
EPREL Registration Number	374903
CE mark	Yes
EU RoHS compliant	Yes
EyeComfort	Yes
Flickering value (PstLM) - Flickering value as	1
per EN 61000-3-3	
Stroboscopic effect visibility measure (SVM)	0.4
Application Conditions	
can it be used in closed luminaires	No

Product Data	
Order product name	CorePro LEDBulbND 120W E27 A67
	840 FR G
Full product name	CorePro LEDBulbND 120W E27 A67
	840 FR G
Full product code	871951434655000
Order code	929002371902
Material Nr. (12NC)	929002371902
Numerator - Quantity Per Pack	1
EAN/UPC - Product/Case	8719514346550
Numerator - Packs per outer box	10
EAN/UPC - Case	8719514346567

Dimensional drawing



CorePro LEDBulbND 120W E27 A67 840 FR G	70 mm	121 mm

D

с

Photometric data

		1 x 9290823719 4800K 13W
		1 x 3000 tim
his inney form	Duarrise retination diagram	UGR-slagram
ATX.	Topold B	The second second
KXXX	(Styles)	
1.88		
KXXX		
12		
	Maxim Internatio	Latinova Table
E2 an. 21	Million R blorg of sciency double.	<u> </u>
Show Ballet		111111111
and particular in		

100-120[°] 120° 50-₩ 90° 90° -50-60° 60° 100 γ 🗡

180°

-150-

-150-

0°


150°

150°

(cd/1000lm)


Product

General uniform lighting - CorePro LEDBulbND 120W E27 A67 840 FR G




Corepro Glass High Lumen bulbs

Photometric data

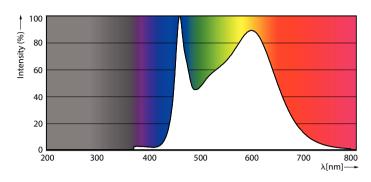

Spectral Power Distribution Colour - CorePro LEDBulbND 120W E27 A67 840 FR G

Lifetime

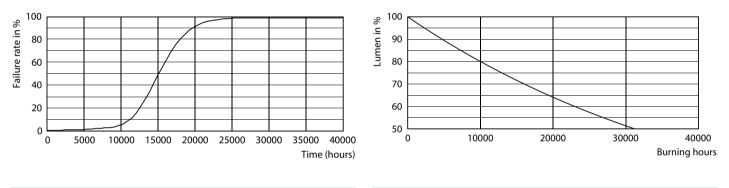

Life Expectancy Diagram

Lumen Maintenance Diagram - CorePro LEDBulbND 120W E27 A67 840 FR G



© 2025 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

www.lighting.philips.com 2025, March 17 - data subject to change