

# SLI003009CW

SLI003009CW


IP44



Power	<b>34 W</b>	Voltage	<b>230 V</b>
Colour temperature	<b>6000 K</b>	Colour of light	<b>CW</b>
Beam angle	<b>15 °</b>	Degree of protection (IP)	<b>IP44</b>


## Technical data

Code	SLI003009CW
Power	34 W
Nominal current	160 mA
Voltage	230 V
Energy consumption	34 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power supply included	+
Luminous flux**	1650 lm (360°)
Lamp efficacy	48 lm/W
Colour temperature	6000 K
Colour of light	CW
Beam angle	15 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Aluminum
Degree of protection (IP)	IP44
Colour	Black
Dimension (AxBxC)	220x150x192 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC

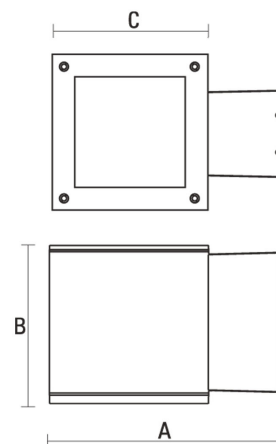


## Related documents



 Declaration of Conformity



 Photometric file