


FLAT KREIS

221156.002.1 | Ceiling and wall luminaires



Ceiling and wall luminaires
4051859075714
D 380, H 78

Ceiling mounting, Wall (surface)
white

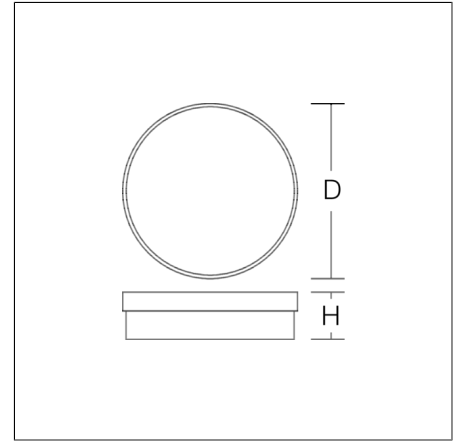

Decorative round surface-mounted luminaire. Base: plastic. Diffuser: plastic (polypropylene), opal. Diffuser fastening: spring system. Homogeneous and smooth light distribution.

Product specifications

Diameter D	380 mm
Height H	78 mm
Weight	2.48 kg
Light source	LED
Colour temperature	4000 K
Rated luminous flux	1300 lm
System power	19 W
System efficiency	68 lm/W
Glare evaluation UGR (4H 8H)	19,8
Beam angle	down 121° up 180°
Rated life	50000 h (L80/B10)
Colour rendering index (CRI)	83
Colour tolerance	3
Photobiological safety according to EN 62471	Risk group 1
Driver	Converter, dimmable
Control	Phase cut-off/cut-on
Voltage	220 - 240 V / 50 - 60 Hz
Luminaires on B10A fuse	77
Luminaires on B16A fuse	124
Luminaires on C10A fuse	77
Luminaires on C16A fuse	124
Inrush current / Inrush current duration	0.22 A / 10000 µs
CIE Flux Code / CEN Flux Code	42 73 92 90 100
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	I
Filament test	650°C - 30 seconds
Impact resistance	IK08
Ambient temperature	25 °C
Conformity mark	CE, EAC

Spareparts



08-221061.002
Replacement diffuser