

# ALGINE

SLI035037WW


LED panel ALGINE, with a power of 45 W, high light efficacy 107 lm/W. It is made of high-quality components, supported by a 5-year warranty. It shines with a warm light (3000K), which promotes relaxation and rest, making the illuminated room cosier. Suitable for surface, recessed and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power	<b>45 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>4820 lm (360°)</b>	Colour temperature	<b>3000 K</b>
Colour of light	<b>WW</b>	Beam angle	<b>120 °</b>
IK	<b>06</b>	Degree of protection (IP)	<b>IP20</b>


## Technical data

Code	SLI035037WW
Power	45 W
Nominal current	200 mA
Voltage	230 V
Energy efficiency class	F
Energy consumption	45 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power supply included	+
Power factor	0.95
Useful luminous flux*	4820 lm (360°)
Luminous flux**	4400 lm (360°)
Lamp efficacy	107 lm/W
Colour temperature	3000 K
Colour of light	WW
Beam angle	120 °
RA	80
Uniformity of color SDCM max	3
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Aluminum, PLASTIC
IK	06
Degree of protection (IP)	IP20
Colour	White
Dimension (AxBxC)	595x595x10 mm
Mounting hole	575x575 mm
For use	Inside
Assembly method	Recessed, On the ceiling, Suspended
Application	INT
Made in	PRC
Other	L80B50 50000h MTBF 80000h ,

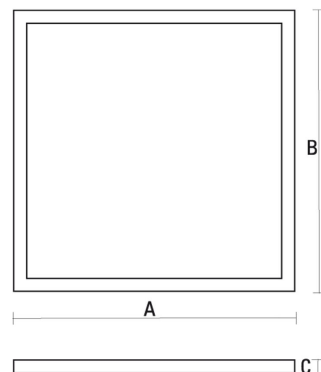

## Related documents



 User manual



 Declaration of Conformity



 Photometric file



 3D model

