

# PRODUCT DATASHEET

## SF BLKH S 300 P 15W 840 WT IP65

SURFACE BULKHEAD 300 SENSOR | Robust wall and ceiling luminaire with IP65 protection and high-frequency sensor



### Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Corridors, stairways, entrance areas
- Passages, underpasses
- Public areas

### Product benefits

- Multiple adjustments of sensor range, daylight detection and hold time
- Suitable for use in dusty and damp locations thanks to high IP rating
- Suitable for use in public areas thanks to high IK rating
- Separate covers available for an aesthetic and functional product design
- 5 years guarantee
- Multiple mounting patterns for convenient installation
- Energy savings of up to 50 % (compared to luminaires that use fluorescent lamps)

### Product features

- High frequency sensor for daylight and motion detection
- UV-stabilized polycarbonate (PC) housing, PC-diffuser
- Impact resistance: IK10
- Push wire terminal for tool-free connection
- Through wiring possible
- Type of protection: IP65
- Luminous flux: up to 1,400 lm
- High luminous efficacy: up to 95 lm/W
- Lifetime (L70/B50) up to 50,000 h (at 25 °C)
- Ambient temperature in operation: -20...+40 °C


## TECHNICAL DATA

### Electrical data


Nominal wattage	15.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	350.000 mA
Inrush current	3.53 A
Inrush current time $T_{h50}$	456 $\mu$ s
Max. number of luminaires per miniature circuit breaker B16	49
Max. number of luminaires per miniature circuit breaker C10	50
Max. number of luminaires per miniature circuit breaker C16	81
Power factor $\lambda$	$\geq 0.7$
Total harmonic distortion	< 8 %
Protection class	II
Operating mode	Integrated LED driver

### Photometrical data

Luminous flux	1400 lm
Luminous efficacy	93 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	< 5 sdc <sub>m</sub>
Luminous intensity	-
Flickering metric (Pst LM)	-
Stroboscope effect metric (SVM)	-
Photobiological safety group acc. to EN62778	RG0
Photobiological safety group acc. to EN62471	RG0
Beam angle	120 °

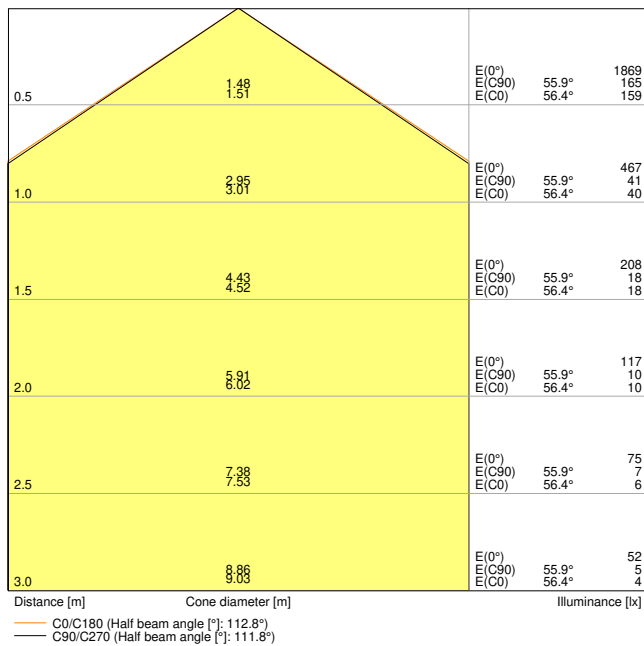


sf\_bkh\_S\_300\_P\_15w\_840\_wt\_ip65\_ldt

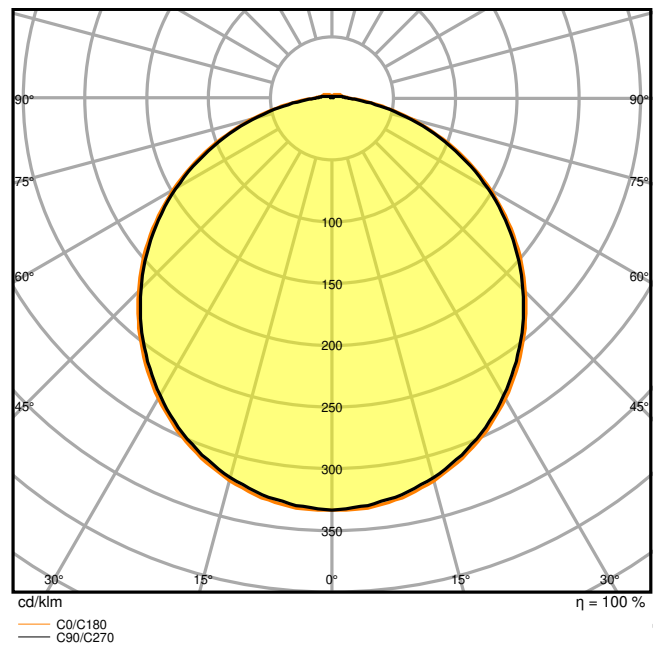

sf\_bkh\_S\_300\_P\_15w\_840\_wt\_ip65\_ldt

### Dimensions & Weight

Diameter	300.00 mm
Height	70.00 mm
Product weight	820.00 g



### Materials & Colors

Product color	White
Housing color	White
Body material	Polycarbonate (PC)
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	850 °C

Mercury content	0.0 mg
-----------------	--------

### Application & Mounting

Ambient temperature range	-20...40 °C
Type of connection	Screwless terminal
Type of protection	IP65
Protection class IK (shock resistance)	IK10
Dimmable	No
Mounting type	Surface
Mounting location	Ceiling / Wall
Application environment	Outdoor
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	50000 h <sup>1)</sup>
Lifespan L80/B10 at 25 °C	35000 h <sup>1)</sup>
Lifespan L80/B50 at 25 °C	35000 h
Lifespan L90/B10 at 25 °C	20000 h
Number of switching cycles	100000

<sup>1)</sup> t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

### Control gear

Output current	350 mA
----------------	--------

### Sensor

Type of sensor	Motion / Light
Sensor technology	Microwave
Sensor detection angle	150 °
Sensor controlled switching time	5 s...30 min
Detection range of motion sensor	3...8 m
Detection threshold of daylight sensor	2...50 lx
Sensor IP rating	IP20

### Emergency lighting

Type of emergency operation test	None
----------------------------------	------

### Certificates & Standards

Standards	CE / CB
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
















Replaceable light source (EPREL)







Not replaceable

## EQUIPMENT / ACCESSORIES

- Additional cover rings in different designs available
- Mounting screws and dowels included

## DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	SF BLKH S 250, 300 P IP65
	Legal information	LS Insert SF Bulkhead Sensor P
	Legal information	Legal insert SF BLKG S P IP65
	Legal information	Informationstext 18 Abs 4 ElektroG
	Declarations of conformity	EC declaration SF BLKH S LUM
	Declarations of conformity UKCA	SF BLKH S IP65
	Declarations of conformity UKCA	SF BLKH S P IP65
Photometric and lighting design files		Document name
	IES file (IES)	SF BLKH 300 15W 4000K S WT IP65
	IES file (IES)	SF BLKH 300 15W 4000K S WT IP65
	IES file (IES)	SF BLKH 300 15W 4000K S WT IP65
	LDT file (Eulumdat)	SF BLKH 300 15W 4000K S WT IP65
	LDT file (Eulumdat)	SF BLKH 300 15W 4000K S WT IP65
	LDT file (Eulumdat)	SF BLKH 300 15W 4000K S WT IP65
	ULD file (DIALux)	SF BLKH S WT 220-240V
	ROLF file (RELUX)	SF BLKH S WT



Photometric and lighting design files		Document name
	UGR file (UGR table)	sf_bkh_S_300_P_15w_840_wt_ip65_ldt
	Light distribution curve type cone	sf_bkh_S_300_P_15w_840_wt_ip65_ldt
	Light distribution curve type polar	sf_bkh_S_300_P_15w_840_wt_ip65_ldt
CAD/BIM files		Document name
	BIM Revit 3D	Surface Bulkhead
	CAD STEP 3D	SF BLKH 300
Tender texts		Document name
	Tender documents	SURFACE BULKHEAD 300 SENSOR 15W 840 WT IP65-EN

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4058075647565	Folding box 1	322 mm x 312 mm x 74 mm	925.00 g	7.43 dm <sup>3</sup>
4058075647572	Shipping box 8	650 mm x 335 mm x 315 mm	8121.00 g	68.59 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



References / Links

– For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.