


FLAT BASIC

211006.002 | Ceiling and wall luminaires



Ceiling and wall luminaires
4010319174961
D 300, H 106

Ceiling mounting, Wall (surface)
pure white (RAL 9010)

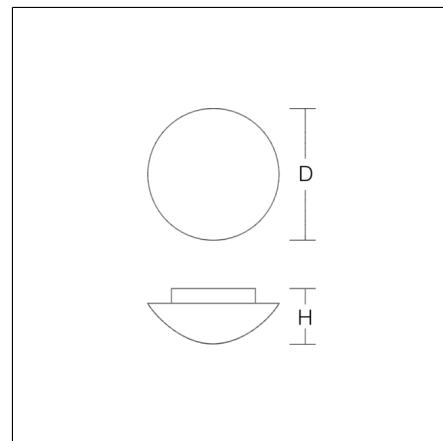

Decorative round surface-mounted luminaire. Base: plastic. Mouth blown 3-layer opal glass (Triplex glass) with satin finish. Diffuser fastening: spring system. Triplex glass produces particularly homogeneous, soft and glare free lighting. Suitable for Ceiling mounting, Wall (surface).

Product specifications

Diameter D	300 mm
Height H	106 mm
Weight	1.79 kg
Light source	1 x A60 max. 75 W, E27
Rated luminous flux	610 lm
System power	57 W
System efficiency	11 lm/W
Glare evaluation UGR (4H 8H)	15,6
Beam angle	down 125° up 180°
Driver	Not necessary
Control	on/off
Voltage	0 - 250 V / 0 - 60 Hz
CIE Flux Code / CEN Flux Code	39 68 88 74 67
Type of protection	IP 43 ceiling mounting IP 44 wall mounting
Protection class	II
Filament test	960°C - 30 seconds
Impact resistance	IK02
Ambient temperature	25 °C
Conformity mark	CE, EAC, UKCA

Spareparts



05-211006.022
Replacement glass