

KombiSIGN 40 / ClassicLOOK

**Siren element 8 tone 24VAC/DC BK**

|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>635.810.75</b>   |
| <b>Series:</b>   | <b>KombiSIGN 40</b> |

**MECHANICAL DATA**

|                             |               |
|-----------------------------|---------------|
| Height                      | 68 mm         |
| Diameter                    | 40 mm         |
| Materials                   | PC            |
| Housing colour              | Black         |
| Protection category         | IP66<br>IP69K |
| Working temperature minimum | -30°C         |
| Working temperature maximum | +60°C         |
| Weight with packaging       | 48 g          |
| Product weight              | 38 g          |

**ELECTRICAL DATA**

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 200 mA             |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 3 |
| Pollution degree            | 3                  |
| Request to external PSU     | SELV/PELV          |

**ACOUSTIC DATA**

|                             |                |
|-----------------------------|----------------|
| Volume (max) at 1m distance | 95,0 dB (A)    |
| Acoustic signal image       | Multi-tone     |
| Number of tones             | 8 tone         |
| Volume adjustable           | Switch         |
| Volume adjustment range     | 89 - 95 dB (A) |
| Acoustic service life       | 500 h minimum  |

**APPROVAL DATA**

|                              |         |
|------------------------------|---------|
| Conforms with CE             | Yes     |
| Conforms with RoHS directive | Yes     |
| WEEE                         | Yes     |
| Conforms with ATEX-directive | No      |
| Conforms with CCC            | No      |
| Conforms with UL             | cULus   |
| UL Type Rating               | Type 12 |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**Siren element 8 tone 24VAC/DC BK**

|                               |                       |
|-------------------------------|-----------------------|
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | Yes                   |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| ICAO Certification            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | No                    |
| Conforms with VdS             | No                    |
| MTTF-value [years]            | 1053                  |

**DRAWING**

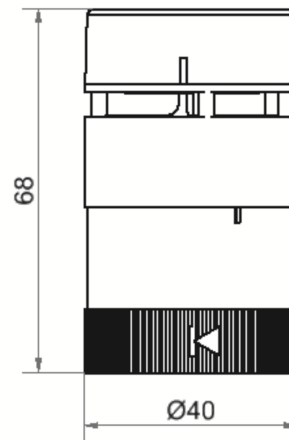

**635.X10.75**

**!** For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.