

# Circularity Profile

## FuPact GS 400A 3P



## Operations Recommended for the End of Life Treatment


The Circularity profile provides information about preparation for re-use and treatment. It identifies the relevant EEE components and materials as well as their location. Safety instructions for product dismantling and depollution are provided into the User manual or maintenance guide.

The components of the product that optimize the recycling performances are listed, identified and located hereunder.

There are several steps to process the products at the end of life so as to recover components, materials or energy :

**Reuse --> Depollution --> Dismantling --> Shredding**

## End of Life Instructions

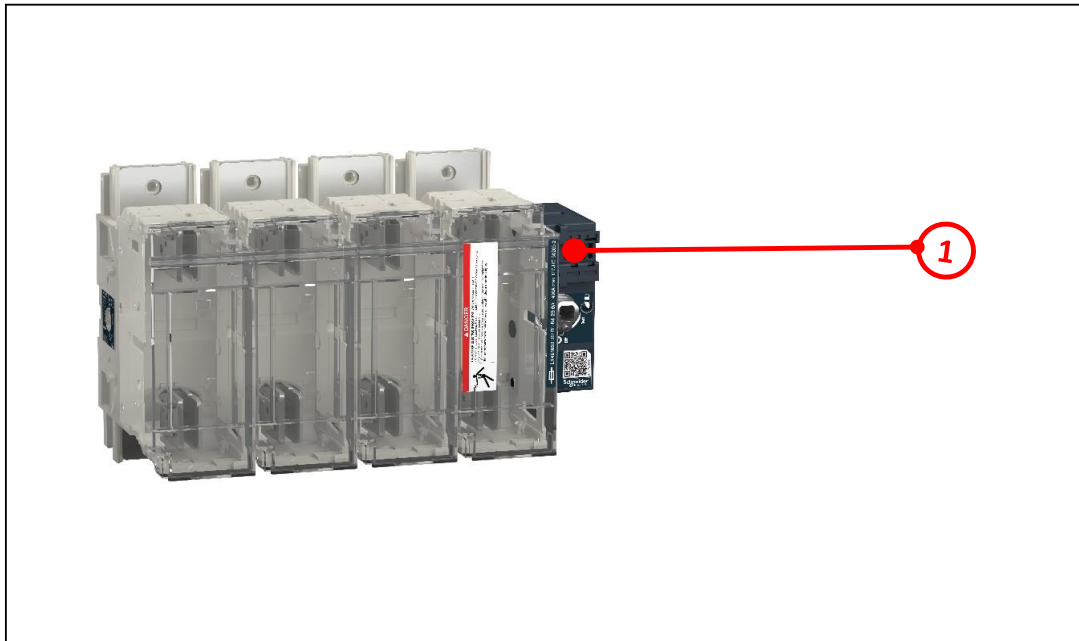

Recommendation	Number on drawing	Component / Material	Mass (%)	Comment
Potential hazards	1	Springs	1%	Mechanical risk. (Potential security hazard for operators)



## Product description

Manufacturer identification	Schneider Electric Industries SAS
Brand name	Schneider Electric
Product function	FuPact GS is manually operated, modular version multipolar fuse combination switch which can be used with high speed fuses (uR) size 2 rated 400A, in external right side or front operation version. This product can be associated with high breaking capacity fuses and make and break on load and provide safety isolation and protection against overcurrent for any low voltage electrical circuit
Product reference	LV481443
Additional similar product references	FuPact GS 3x100 A & FuPact GS 3x250 A
Total representative product mass	4286 g
Representative product dimensions	355mm x 271mm x 260mm
Date of information release	04/2020



## Additional information

Legal information	This product family is in the scope of European Union directive 2012/19/EU on Waste Electrical and Electronic Equipment (WEEE). The product family must be disposed according to the legislation of the country. This document is intended for use by end of life recyclers or treatment facilities. It provides the basic information to assure an appropriate end of life treatment for the components and materials of the product.	
Recyclability potential	<b>6.3%</b>	Based on "ECO'DEEE recyclability and recoverability calculation method" (version V1, 20 Sep. 2008 presented to the French Agency for Environment and Energy Management: ADEME).

Schneider Electric Industries SAS  
Country Customer Care Center  
<http://www.schneider-electric.com/contact>  
35, rue Joseph Monier  
CS 30323  
F- 92506 Rueil Malmaison Cedex  
RCS Nanterre 954 503 439  
Capital social 896 313 776 €

[www.schneider-electric.com](http://www.schneider-electric.com)

ENVEOLI2003006\_V1

Published by Schneider Electric

© 2019 - Schneider Electric – All rights reserved

04/2020