

WLD+40013_CASAMBI

WLD+40013_CASAMBI



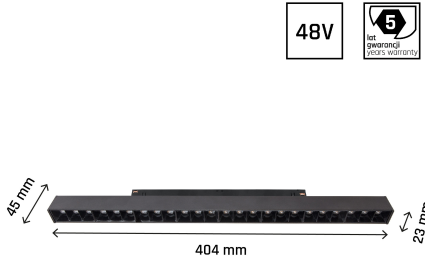

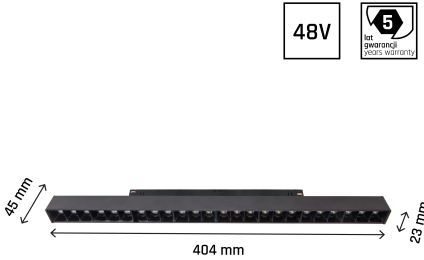


Power	22 W	Voltage	48 V
Colour temperature	3000 K	Colour of light	WW
Beam angle	35 °	Degree of protection (IP)	IP20

Technical data

Code	WLD+40013_CASAMBI
Power	22 W
Nominal current	450 mA
Voltage	48 V
Energy consumption	22 kWh/1000h
Frequency	DC Hz
Protection class	III
Manufacturer of power supply	tuobo
Power factor	1
Useful luminous flux*	2250 lm (360°)
Luminous flux**	1550 lm (360°)
Lamp efficacy	102 lm/W
Luminous intensity	4600 cd
Colour temperature	3000 K
Colour of light	WW
Beam angle	35 °
RA	>90
Light source included	Yes
Producer of LED diodes	osram
Uniformity of color SDCM max	5
Dimmable	CASAMBI
Working temperature range	-20 to +40 °
Lifespan	50000 h
Housing material	AL+PC
Degree of protection (IP)	IP20
Colour	Black
Dimension (AxBxC)	404x23x42 mm
For use	Inside
Assembly method	NA SZYŃĘ
Application	Inside
Made in	PRC
Other	CASAMBI ,





 <p>48V </p> <p>45 mm 404 mm 23 mm</p> <p>Die Montage erfolgt über ein einfaches Klick-System zusätzlich lässt sich die Leuchte je nach Bedarf verschieben</p>	 <p>48V </p> <p>45 mm 404 mm 23 mm</p> <p>Luminaire assembly within the track on "click" and its free arrangement</p>	
--	---	---