

## ESTC PSK 5000 SN7249 (769 511)

- Earthing and short-circuiting devices can be configured online via the EaS configurator
- For connecting the phase cables of single-pole and three-pole earthing and short-circuiting devices to the overhead line
- With long threaded T pin shaft
- Wide clamping range



Figure without obligation

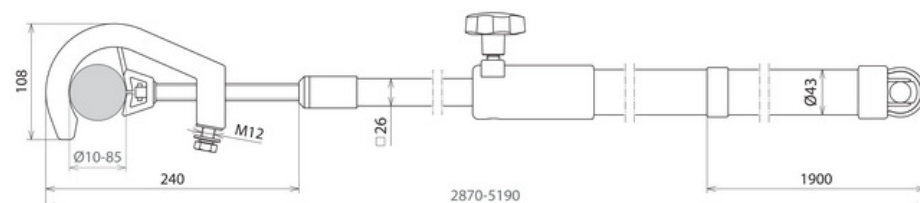


Figure without obligation

Type	ESTC PSK 5000 SN7249
Part No.	769 511
Clamping range Ø	10 ... 85 mm
Anti-rotation element	PK2
For cable cross-section Cu	16 ... 150 mm <sup>2</sup>
Max. short-circuit current I <sub>k</sub> 0.5 s	29.6 kA
Max. short-circuit current I <sub>k</sub> 1 s	29.6 kA
Standard	EN/IEC 61230 (DIN VDE 0683-100), threaded T pin shaft DIN 48087
Temperature range	-25 °C ... +55 °C
Material (pressure plate)	Aluminium alloy
Material (clamp body)	Aluminium alloy
Material (shaft)	StSt
Material (insulating tube)	Glass-fibre reinforced polyester tube
Material (threaded coupling, star knob)	Aluminium alloy
Total length (l <sub>G max</sub> / l <sub>G min</sub> )	5200 / 2875 mm
Length (handle)	1900 mm
Diameter (stick)	43 mm
Weight	4,41 kg
Customs tariff number	82055980
GTIN	4013364135055
PU	1 Stk

We reserve the right to introduce changes in performance, configuration and technology, dimensions, weights and materials in the course of technical progress. The figures are shown without obligation.

The clamps must be designed for the same maximum short-circuit current as the earthing and short-circuiting cables!