


DEECOS S mini

742207.004 | Surface mounted projector



Surface mounted projectors
4051859821168
D 87, H 214

Track on ceiling, Wall track
silver



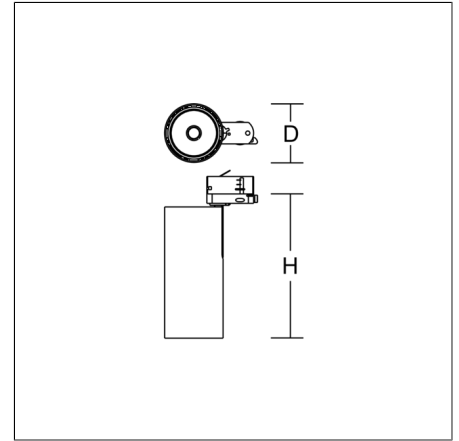
















LED surface-mounted projector in modern design with no visible cooling ribs. Housing: die-cast aluminium, powder-coated. Rotation range: 356°. Swivel range: 90°. Black plastic ring and recessed LED to prevent glare from the side. Optical assembly with lens made of plastic (polycarbonate) for the best homogeneous light distribution - can be changed without tools. Best colour rendering index Ra>90. With multi adaptor for 3-circuit tracks 230 V. Suitable for Track on ceiling, Wall track. High quality converter without flickering and stroboscopic effect. The following accessories can be mounted without use of tools: interchangeable lenses, decorative glasses, honeycomb louvre, clear and frosted diffusers, white interchangeable plastic ring.

Product specifications

| | |
|--|----------------------------|
| Diameter D | 87 mm |
| Height H | 214 mm |
| Weight | 1.15 kg |
| Light source | LED |
| Colour temperature | 3000 K |
| Rated luminous flux | 3000 lm |
| System power | 29 W |
| System efficiency | 103 lm/W |
| Glare evaluation UGR (4H 8H) | 16,4 |
| Beam angle | 31° |
| Rated life | 50000 h (L90/B10) |
| Colour rendering index (CRI) | 92 |
| Colour tolerance | 2 |
| Photobiological safety according to EN 62471 | Risk group 1 |
| Driver | Converter |
| Control | on/off |
| Voltage | 220 - 240 V / 50 Hz, 60 Hz |
| Luminaires on B10A fuse | 21 |
| Luminaires on B16A fuse | 34 |
| Luminaires on C10A fuse | 35 |
| Luminaires on C16A fuse | 57 |
| Inrush current / Inrush current duration | 11.1 A / 250 µs |
| CIE Flux Code / CEN Flux Code | 96 100 100 100 100 |
| Type of protection | IP 20 |
| Protection class | I |
| Filament test | 650 °C |
| Impact resistance | IK06 |
| Ambient temperature | -20 °C ... + 25 °C |
| Conformity mark | CE, EAC |

Accessories

| | | | |
|--|---|---|--|
|  | 982370.000 Diffuser, transparent |  | 982370.010 Diffuser, satinated |
|  | 982371.003 Anti-glare honeycomb louvre |  | 982369.003 Spot lens |
|  | 982369.013 Medium lens |  | 982369.023 Flood lens |
|  | 982421.002 White plastic ring for lens. |  | 982368.003 Reflector spot |
|  | 982368.013 Reflector medium |  | 982368.023 Reflector flood |
|  | 982369.033 Wide flood lens |  | 982369.043 Oval corridor lens |
|  | 982419.002 White plastic ring for reflector. |  | 982368.033 Reflector wide flood |
|  | 982647.002 Decorative glass opal matt |  | 982648.002 Decorative glass opal matt |
|  | 70319.009 Point outlet for 3-circuit multi adaptor | | |