

LIMEA PRISMATICA

SLI028036NW_PW

See
more



LED luminaire LIMEA PRISMATICA, with a power of 40 W, high light efficacy 128 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a high IP44 rating, making it ideal for use in rooms with high humidity. IK10 class provides impact resistance. It shines with light of neutral - the most universal colour (4000K). Suitable for both surface and suspended mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.



Power	40 W	Voltage	230 V
Luminous flux*	5100 lm (360°)	Colour temperature	4000 K
Colour of light	Neutral white	Beam angle	100 °
IK	10	Degree of protection (IP)	IP44

Technical data

Code	SLI028036NW_PW
Power	40 W
Nominal current	180 mA
Voltage	230 V
Energy consumption	40 kWh/1000h
Frequency	50HZ Hz
Protection class	I
Power factor	0.96
Useful luminous flux*	5100 lm (360°)
Luminous flux**	4600 lm (360°)
Lamp efficacy	128 lm/W
Luminous intensity	1700 cd
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	100 °
RA	>80
Light source included	Yes
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	Plastic - PC
IK	10
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	1200x110x60 mm
For use	Inside
Assembly method	On the ceiling, Suspended
Made in	PRC

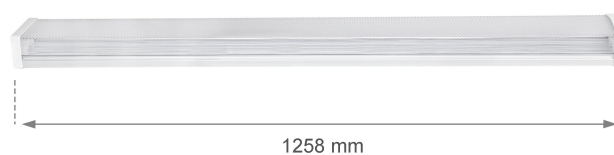

Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

