

KombiSIGN 40 / ClassicLOOK

## KS40 Classic BWM 24VAC/DC GN/YE/RD



|                  |                     |
|------------------|---------------------|
| <b>Part No.:</b> | <b>639.300.01</b>   |
| <b>Series:</b>   | <b>KombiSIGN 40</b> |

### MECHANICAL DATA

|                              |                                |
|------------------------------|--------------------------------|
| Height                       | 215 mm                         |
| Diameter                     | 40 mm                          |
| Materials                    | PC                             |
| Dome colour                  | Green<br>Red<br>Yellow         |
| Housing colour               | Black                          |
| Protection category          | IP66<br>IP69K                  |
| Connection                   | Push-in terminal               |
| cross-sectional area minimum | 0,25mm <sup>2</sup> / 24AWG    |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG    |
| Cable entry                  | Through hole                   |
| Cable entry maximum          | d = 9 mm                       |
| Tension relief               | Not present                    |
| Type of fixing               | Base mounting<br>Wall mounting |
| Working temperature minimum  | -30°C                          |
| Working temperature maximum  | +60°C                          |
| Weight with packaging        | 210 g                          |
| Product weight               | 129 g                          |

### ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | AC/DC              |
| Operating voltage frequency | 50Hz               |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 40 mA              |
| Rated inrush current        | 500 mA             |
| Protection class            | Protection class 3 |
| Pollution degree            | 3                  |
| Request to external PSU     | SELV/PELV          |

### OPTICAL DATA

|              |                        |
|--------------|------------------------|
| Light source | LED                    |
| Light colour | Green<br>Red<br>Yellow |

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

## KS40 Classic BWM 24VAC/DC GN/YE/RD

|                      |                    |
|----------------------|--------------------|
| Optical signal image | Blink<br>Permanent |
| Blink frequency      | 1 Hz               |
| Service life optical | 50,000 h maximum   |

### APPROVAL DATA

|                              |                                |
|------------------------------|--------------------------------|
| Conforms with CE             | Yes (through the components)   |
| Conforms with RoHS directive | Fulfills substance restriction |
| WEEE                         | Yes                            |
| Conforms with ATEX-directive | No                             |
| Conforms with CCC            | No                             |
| Conforms with UL             | No                             |
| Conforms with FCC            | No                             |
| Conforms with IC             | No                             |
| EAC certificate available    | Yes                            |
| Conforms with AS-I           | No                             |
| ICAO Certification           | No                             |
| Conforms with DNV            | No                             |
| Conforms with RoHS CN        | No                             |
| Conforms with VdS            | No                             |




For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

KombiSIGN 40 / ClassicLOOK

**KS40 Classic BWM 24VAC/DC GN/YE/RD**

**DRAWING**

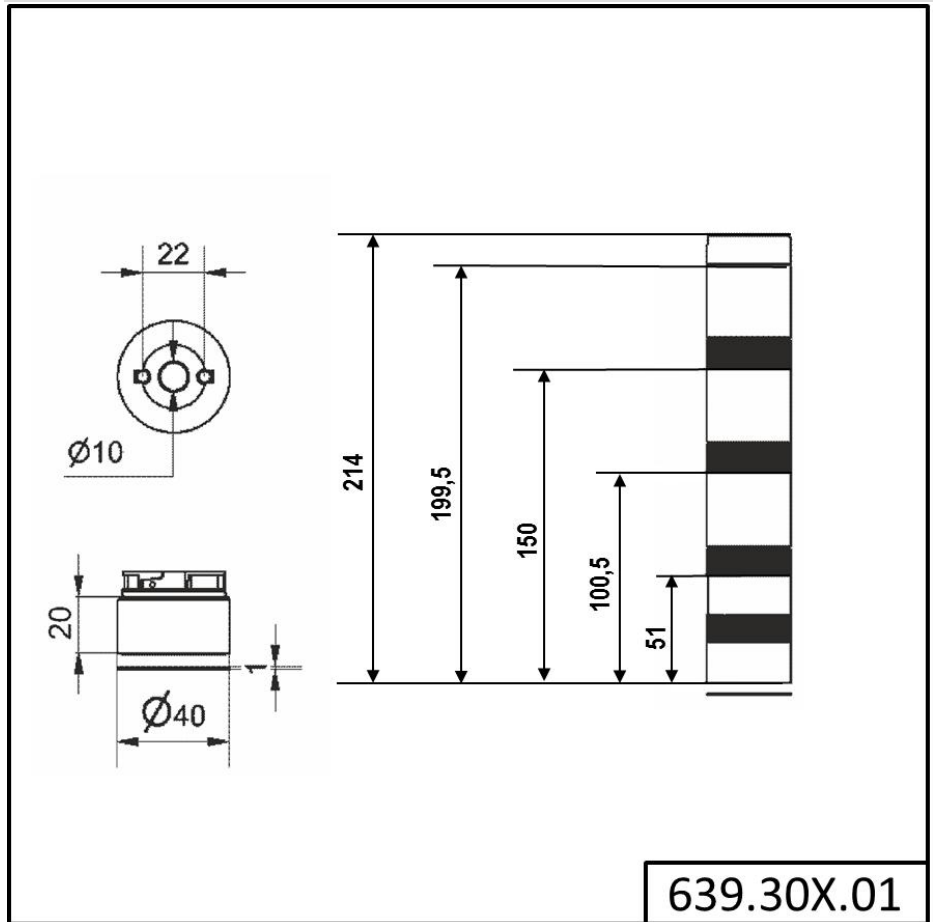

! For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.