



Ledinaire panel

RC065B LED34S/830 PSU W60L60 NOC

- Power supply unit (ON/OFF)

The Philips Ledinaire panel Gen4 (RC065B) range features a selection of popular off-the-shelf LED luminaires that come with Philips high quality levels at a competitive price. Reliable, energy efficient and affordable, this latest generation of 600 x 600 mm Ledinaire LED panel lights are designed for diffuse, comfortable lighting in a wide range of general lighting applications. Our range of Ledinaire panel lighting is also available with accessories for easy installation on different types of ceilings – just what you need

Product data

General Information		Luminaire light beam spread	
Light source replaceable	No	Luminaire light beam spread	120°
Number of gear units	1 unit	Unified glare rating CEN	22
Driver included	Yes	Operating and Electrical	
Lighting Technology	LED	Input Voltage	220-240 V
Value ladder	Value	Line Frequency	50 or 60 Hz
Light Technical		Input Frequency	50 or 60 Hz
Luminous Flux	3,400 lumen	Initial CLO power consumption	- W
Saturated Red (R9)	<50	Average CLO power consumption	- W
Correlated Color Temperature (Nom)	3000 K	Power Consumption	34 W
Luminous Efficacy (rated) (Nom)	100 lm/W	Inrush current	16 A
Color rendering index (CRI)	>80	Inrush time	0.18 ms
Flickering value (PstLM)	1	Power Factor (Fraction)	0.9
Stroboscopic effect value (SVM)	0.4	Connection	Push-in connector 2-pole
Beam angle of light source	- degree(s)	Cable	-
Light source color	830 warm white	Number of products on MCB of 16 A type B	32
Optic type	Beam angle 120°		


Ledinaire panel

Temperature	
Ambient temperature range	-10 to +25 °C
Controls and Dimming	
Dimmable	No
Driver/power unit/transformer	Power supply unit (ON/OFF)
Control interface	-
Constant light output	No
Mechanical and Housing	
Housing Material	Steel
Reflector material	Acrylate
Optic material	Polystyrene
Optical cover/lens material	Acrylate
Fixation material	-
Housing Color	White
Optical cover/lens finish	Opal
Overall length	595 mm
Overall width	595 mm
Overall height	34 mm
Dimensions (Height x Width x Depth)	34 x 595 x 595 mm
Approval and Application	
Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK02 [0.2 J standard]
Sustainability rating	-
Protection class IEC	Safety class II
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	-
Warranty period	3 years
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes

Initial Performance (IEC Compliant)	
Luminous flux tolerance	+/-10%
Initial chromaticity	(0.43, 0.40) SDCM≤5
Power consumption tolerance	+/-10%
Over Time Performance (IEC Compliant)	
Control gear failure rate at median useful life 50000 h	7.5 %
Lumen maintenance at median useful life* 35000 h	-
Lumen maintenance at median useful life* 50000 h	80
Lumen maintenance at median useful life* 75000 h	70
Lumen maintenance at median useful life* 100000 h	-
Application Conditions	
Performance ambient temperature Tq	25 °C
Maximum dim level	Not applicable
Suitable for random switching	Yes
Product Data	
Full product code	871951453066999
Order product name	RC065B LED34S/830 PSU W60L60 NOC
Order code	911401850882
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	4
Material number (12NC)	911401850882
Full product name	RC065B LED34S/830 PSU W60L60 NOC
EAN/UPC - Case	8719514530751



Dimensional drawing

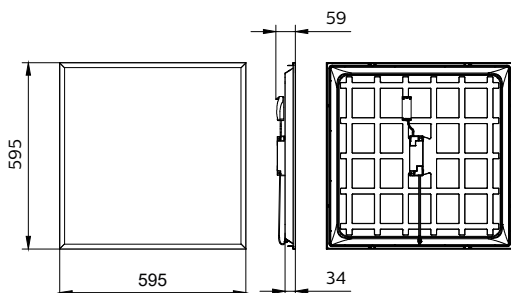

Ledinaire panel

