

NOCTIS LUX 3

SLI029054CW_CZUJNIK_PW



See
more

Floodlight NOCTIS LUX 3, with a power of 30 W. It has a high IP44 rating, making it ideal for use in areas of high humidity. IK07 class provides impact resistance. It shines with a cold light (6000K). Designed for surface mounting.

IP44


IK07



| | | | |
|-----------------|-----------------------|---------------------------|---------------|
| Power | 30 W | Voltage | 230 V |
| Luminous flux* | 2900 lm (120°) | Colour temperature | 6000 K |
| Colour of light | CW | Beam angle | 100 ° |
| IK | 07 | Degree of protection (IP) | IP44 |

Technical data

| | |
|------------------------------|------------------------|
| Code | SLI029054CW_CZUJNIK_PW |
| Power | 30 W |
| Nominal current | 130 mA |
| Voltage | 230 V |
| Energy consumption | 30 kWh/1000h |
| Frequency | 50HZ Hz |
| Protection class | I |
| Power supply included | + |
| Power factor | 0.9 |
| Useful luminous flux* | 2900 lm (120°) |
| Luminous flux** | 2900 lm (360°) |
| Lamp efficacy | 97 lm/W |
| Colour temperature | 6000 K |
| Colour of light | CW |
| Beam angle | 100 ° |
| RA | >70 |
| Uniformity of color SDCM max | 5 |
| Dimmable | No |
| Working temperature range | -20/+40 ° |
| Lifespan | 17000 h |
| Housing material | Aluminum, GLASS |
| IK | 07 |
| Degree of protection (IP) | IP44 |
| Colour | White |
| Dimension (AxBxC) | 150x190x53 mm |
| For use | Outside |
| Assembly method | On the ceiling |
| Application | EXT |
| Made in | PRC |

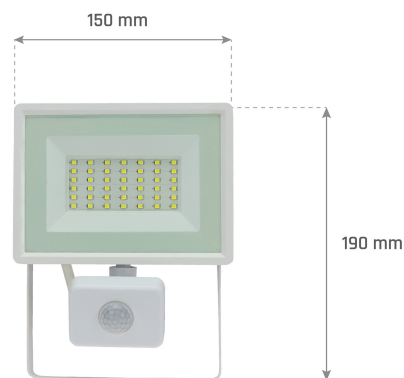

Related documents



 Declaration of Conformity



 Photometric file

