


GSUN 3

672520.002.04 | Luminaires for escape route identification



Ceiling and wall luminaires
4051859712015
L 241, B 126, H 147

Ceiling mounting, Wall (surface)
white

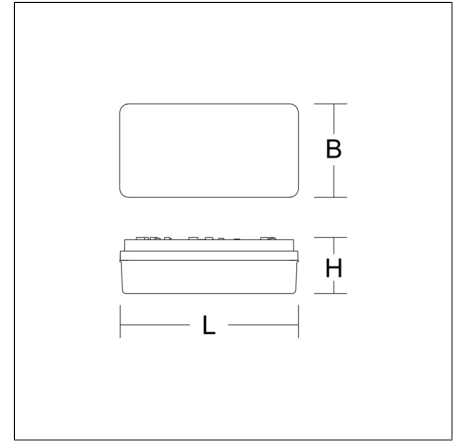

Luminaire for escape route identification. Base: plastic Diffuser: plastic, opal 4 plastic foils with escape route motifs included (ISO 7010). Suitable for Ceiling mounting, Wall (surface). Pendant luminaire also possible with accessories. Electronic ballast included. Self-contained system with automatic self-test and feedback to the RZB monitoring system MULTIDIGIT.

Product specifications

Typ of emergency lighting	Self-contained system
Monitoring	MultiDigit
Battery	LiFePO4
Duration	3 h
Operating mode	maintained power mode
Viewing Distance	21 m
Length L	241 mm
Width B	126 mm
Height H	147 mm
Weight	440 g
Light source	LED
Colour temperature	4000 K
System power, mains operation	4 W
Colour rendering index (CRI)	80
Driver	Electronic ballast
Control	on/off
Voltage	220 - 240 V / 50 Hz, 60 Hz
Type of protection	IP 54
Protection class	II
Filament test	650 °C
Impact resistance	IK03
Ambient temperature for maintained power	5 °C ... + 25 °C
Ambient temperature for non-maintained power mode	5 °C ... + 40 °C
Conformity mark	CE

Accessories



981167.002
Ball impact guard



983100.000
Mounting kit for chains/cable suspensions



981144.002.1
Wall bracket



983101.002
Suspension system