

# Product Data Sheet

## GW68521

68 ACS Range





The main supply boards for the construction site type 68 QP ACS and 68 CDK ACSK: installed immediately downstream from the energy meter, to protect the line from the delivery board to the main site distribution board. They are available in versions with power from 17 kW (32A) to 130 kW (250A), all fitted with an emergency push-button.

Type	QP ACS	board type	Wired
Colour	Grey RAL 7035	Outer dim. LxHxD (mm)	405x500x200
Weight (kg)	16	Accordance with Standards	EN 61439-4 (ACS)
Characteristics	UV resistance (EN 62208)	IP degree	IP66
Mechanical resistance	IK10	Glow wire test	960 °C
Thermo-pressure with ball	200 °C	Insulation class	II
No. of poles	4	Power suppliable (kW)	60
Mains switch	MTHP 125	RCCB protection	Side-by-side -adjustable
MCB'S MT main RCCB	RCCB 125A 4P adjustable - A type	Emergency push-button	Yes
Electrocod	139		

### BEHAVIOUR WITH CHEMICAL AND ATMOSPHERIC AGENTS

Saline solution	Acids		Bases		Solvents				Mineral oil	UV rays
	Concentrated	Diluted	Concentrated	Diluted	Hexane	Benzol	Acetone	Ethyl alcohol		
Resistant	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Limited resistance	Not resistant	Limited resistance	Resistant	Resistant

### DIMENSIONAL

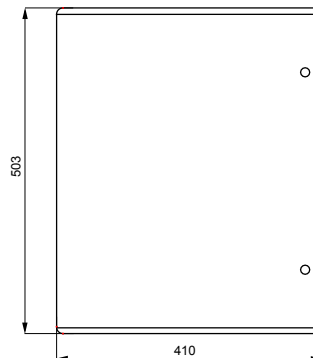

### TECHNICAL SYMBOLOGY



EN 61439-4 (ACS)



UV resistance (EN 62208)

IP

IP66

IK

IK10

GWT

960 °C



200 °C



II

### STANDARDS/APPROVALS



GEWISS S.p.A. Via A. Volta, 1  
24069 Cenate Sotto - Bergamo - Italy  
tel. +39 035 94 61 11 fax +39 035 94 69 09

www.gewiss.com  
sat@gewiss.com  
Last update 20/04/2023

Data, measures, designs and pictures are shown only as informative purposes, and could be changed without previous notice