


Product Data Sheet


GW66781

IB Range



| | | | |
|-----------------------------|--------------|-----------------------------|------------|
| IP degree | IP66 | Dispersible power (W) | 18 |
| Mechanical resistance | > IK10 | Houseable interloc. socket | 1 |
| Houseable IB socket-outlets | 16/32 A SELV | No. of modules EN 50022 | 6 |
| Side entries | 2xØ 23 | Top entries | 2xØ 23/29 |
| Glow Wire Test | 850 °C | Suitable for | Heavy duty |
| Electrocod | 2222 | Impact resistance at -20 °C | 20 J |

DIMENSIONAL

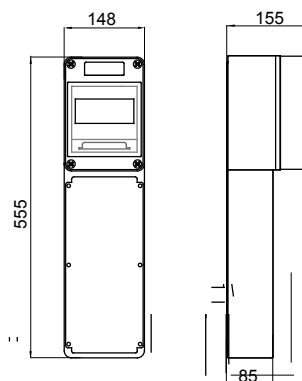

TECHNICAL SYMBOLOGY

IP

IK

GWT

IP66

> IK10

850 °C

STANDARDS/APPROVALS

