

HF-Basic II for TL-D lamps

HF-B 158/258 TL-D EII 220-240V 50/60Hz


Affordable, reliable, CE complying, high frequency electronic ballast for TLD fluorescent lamps Ideal alternative for electromagnetic (EM) ballasts

Product data

General Information		T-Case Lifetime (Nom)		T-Case Maximum (Max)	
Number of Lamps	2 piece/unit		75 °C		75 °C
Operating and Electrical		Mechanical and Housing			
Input Voltage	220 to 240 V	Housing	- [Not Specified]		
Line Frequency	50 to 60 Hz	Approval and Application			
Input Frequency	50 to 60 Hz	Energy Efficiency Index	A2		
Inrush Current Width	0.35 ms	Safety Standard	IEC 61347-2-3		
Inrush Current Peak (Max)	31 A	Environmental Standard	ISO 14001		
Number of Products on MCB (16A Type B) (Nom)	12	Approval Marks	CE marking ENEC certificate VDE-EMV certificate		
Wiring		Product Data			
Connector Type Input Terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]	Full product code	871150093160330		
Connector Type Output Terminals	WAGO 251 universal connector [Suitable for both automatic wiring (ALF and ADS) and manual wiring]	Order product name	HF-B 158/258 TL-D EII 220-240V 50/60Hz		
Cable Length From Device to Lamp	2.00 m	Order code	913700192966		
Temperature		Numerator - Quantity Per Pack	1		
Ambient temperature range	-15 °C to 50 °C	Numerator - Packs per outer box	12		
		Material number (12NC)	913700192966		
		Full product name	HF-B 158/258 TL-D EII 220-240V 50/60Hz		
		EAN/UPC - Case	8711500931610		

HF-Basic II for TL-D lamps

Dimensional drawing

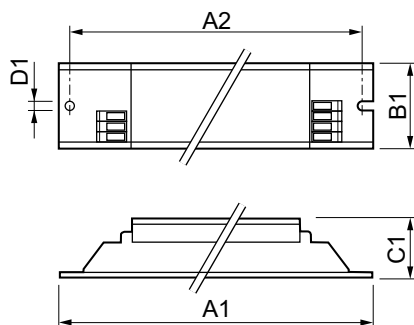

Product	D1	C1	A1	A2	B1
HF-B 158/258 TL-D EII 220-240V 50/60Hz	4.2 mm	28.0 mm	280.0 mm	265.0 mm	30.0 mm

