



# CoreLine Batten

## BN126C LED74S/830 PSU L1500

- 830 warm white - Power supply unit (ON/OFF)

The CoreLine Batten delivers on the CoreLine promise of innovative, easy-to-use and high-quality luminaires. The efficient design makes installation quick and easy, enabling seamless light-line creation without additional accessories. CoreLine Batten provides universal light distribution, supporting homogeneous illuminance and visual comfort. Interact Ready luminaires with integrated wireless communications are also available, for use with Interact gateways, sensors and software.

### Warnings and Safety

- The product is IPX0 & as such is not protected against water ingress & as such we strongly recommend that the environment in which the luminaire is to be installed is suitably checked
- If the above advice is not taken and the luminaires are subject to water ingress, Philips / Signify cannot guarantee safe failure & product warranty will become void

### Product data

General Information	
Light source color	830 warm white
Light source replaceable	No
Number of gear units	1 unit
Driver/power unit/transformer	Power supply unit (ON/OFF)
Driver included	Yes
Optic type	Beam angle 120°
Luminaire light beam spread	120°
Connection	Push-in connector 3-pole
Cable	-
Protection class IEC	Safety class I
Glow-wire test	Temperature 650 °C, duration 30 s
Flammability mark	For mounting on normally flammable surfaces
CE mark	Yes
ENEC mark	ENEC mark
Warranty period	5 years
Constant light output	No
Number of products on MCB of 16 A type B	8
Photobiological risk	Photobiological risk group 0 @200mm to EN62778
Photobiological risk specification	0.2 m
EU RoHS compliant	Yes
Unified glare rating CEN	26

# CoreLine Batten

Lighting Technology	LED
Brand	Philips
Value ladder	Performance

## Light Technical

Luminous Flux	7,400 lumen
Saturated Red (R9)	<50
Luminous Efficacy (rated) (Nom)	120 lm/W
Color rendering index (CRI)	>80
Flickering value (PstLM)	1
Stroboscopic effect value (SVM)	1.6

## Operating and Electrical

Input Voltage	220-240 V
Line Frequency	50 or 60 Hz
Input Frequency	50 or 60 Hz
Power Consumption	59 W
Inrush current	15.7 A
Inrush time	0.678 ms
Power Factor (Fraction)	0.9

## Temperature

Ambient temperature range	-20 to +40 °C
---------------------------	---------------

## Controls and Dimming

Dimmable	No
----------	----

## Mechanical and Housing

Housing Material	Steel
Reflector material	-
Optic material	Polycarbonate
Optical cover/lens material	Polycarbonate
Fixation material	-
Housing Color	White RAL 9003
Optical cover/lens finish	Opal
Overall length	1,450 mm
Overall width	65 mm

Overall height	65 mm
Dimensions (Height x Width x Depth)	NaN x NaN x NaN mm

## Approval and Application

Ingress protection code	IP20 [Finger-protected]
Mech. impact protection code	IK04 [0.5 J standard plus]
Sustainability rating	-

## Initial Performance (IEC Compliant)

Luminous flux tolerance	+/-10%
Init. Corr. Color Temperature	3000 K
Initial chromaticity	(0.43, 0.40) SDCM≤3
Power consumption tolerance	+/-10%

## Over Time Performance (IEC Compliant)

Control gear failure rate at median useful life	5 %
50000 h	
Lumen maintenance at median useful life*	80
50000 h	

## Application Conditions


Performance ambient temperature Tq	25 °C
Suitable for random switching	Not applicable

## Product Data

Full product code	871951494887799
Order product name	BN126C LED74S/830 PSU L1500
Order code	911401834884
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material number (12NC)	911401834884
Net weight	1.360 kg
Full product name	BN126C LED74S/830 PSU L1500
EAN/UPC - Case	8719514949096



## Dimensional drawing

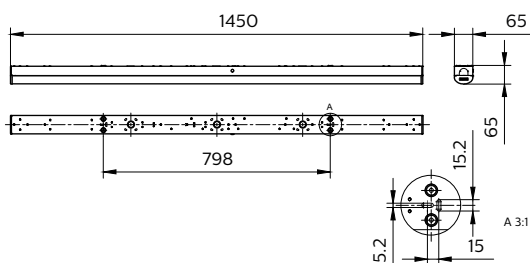

## CoreLine Batten

