



## Classia

- One-way switch 16AX 1P lightable with led lamp
- One-way switch 16AX 2P lightable with led lamp

RW4001LS - RG4001LS  
 RW4001LP - RG4001LP  
 RW4002L - RA4002L - RG4002L



..4001..



..4002..

### Use

Rocker control device for lighting and other loads.  
 Lightable with supplied led.

### Connection

Terminal type: screw clamp  
 Terminal capacity: 2 x 4 mm<sup>2</sup> max  
 Stripping length: 9 mm  
 Compatible with flexible or rigid cables


### Range

Designation	Item 1 Module	Led Lamp
One-way switches 1P 16AX 250 Va.c.	<input type="checkbox"/> RW4001LS	230V
	<input checked="" type="checkbox"/> RG4001LS	
	<input type="checkbox"/> RW4001LP	230V
	<input checked="" type="checkbox"/> RG4001LP	
One-way switches 2P 16AX 250 Va.c.	<input type="checkbox"/> RW4002L	230V
	<input checked="" type="checkbox"/> RA4002L	
	<input checked="" type="checkbox"/> RG4002L	

Color code:

White colour     Aluminum colour     Black colour

### Overall dimensions (mm)

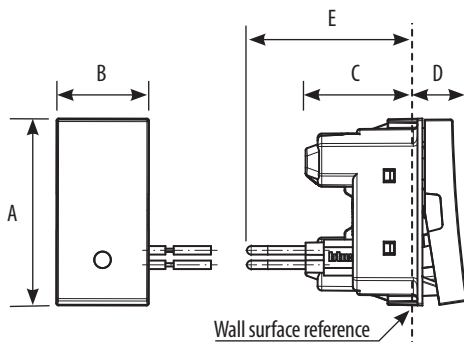

	A	B	C	D	E
..4001..	45.1	22.3	27	11.9	29.5
..4002..	45.1	22.3	28.1	11.9	30.6

### Technical characteristics

#### - Protection index

(considering a complete installation, including cover plate)  
 Penetration by solid bodies/liquid: IP40

#### - Mechanical characteristics

Impact test: IK 04

#### - Material characteristics

Material:  
 Case: PC (Polycarbonate)  
 Key cover: ABS - ABS/PC  
 UV resistant.

#### Self-extinguishing:

850° C / 30 s for insulating parts holding live parts in place  
 650° C / 30 s for other parts made of insulating materials

#### - Electrical characteristics

Voltage: 250 V a.c.  
 Current: 16AX

#### - Climatic characteristics

Storage temperature: -10° C to +70° C  
 Use temperature: -5° C to +35° C

### Cleaning

Clean the surface with a cloth.  
 Do not use acetone, tar-removing cleaning agents or trichloroethylene.  
**Caution:** Always test before using special cleaning products.

### Standards and approvals

Compliance with standards IEC/EN 60669-1.  
 Refer to e.catalogue.