


# DURE 3 MAX

SLI043014NW\_PW



See  
more

Downlight luminaire DURE 3 MAX, with a power of 18 W, high light efficacy 122 lm/W. It is made of high-quality components, supported by a 5-year warranty. It has a high IP44 rating, making it ideal for use in rooms with high humidity. Lights up with neutral light - the most universal colour (4000K), which is suitable for the rooms we use on a daily basis, ensuring comfort during everyday activities. Designed for recessed mounting. The product is certified by the National Institute of Hygiene, so it can be used in rooms with high hygienic requirements.

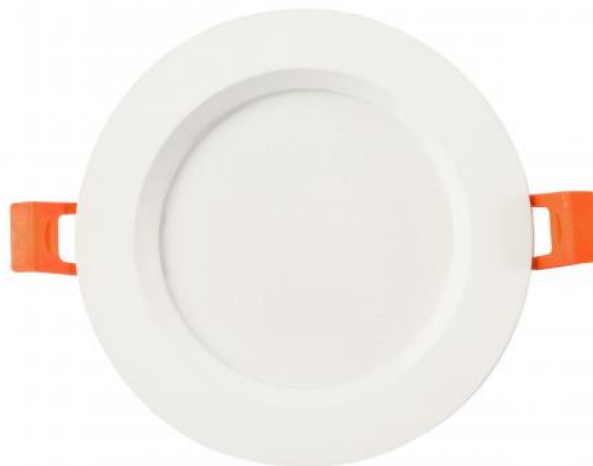

Power	<b>18 W</b>	Voltage	<b>230 V</b>
Luminous flux*	<b>2200 lm (360°)</b>	Colour temperature	<b>4000 K</b>
Colour of light	<b>Neutral white</b>	Beam angle	<b>110 °</b>
IK	<b>6</b>	Degree of protection (IP)	<b>IP44</b>

## Technical data

Code	SLI043014NW_PW
Power	18 W
Nominal current	94 mA
Voltage	230 V
Energy consumption	18 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0.8
Useful luminous flux*	2200 lm (360°)
Luminous flux**	1500 lm (360°)
Lamp efficacy	122 lm/W
Colour temperature	4000 K
Colour of light	Neutral white
Beam angle	110 °
RA	80
Uniformity of color SDCM max	5
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	50000 h
Housing material	PA6+Aluminum
IK	6
Degree of protection (IP)	IP44
Colour	White
Dimension (AxBxC)	190x30 mm
Mounting hole	155 mm
For use	Inside
Assembly method	Recessed
Application	INT
Made in	PRC



## Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

