


Lota CCT Recessed Modular



- Recessed luminaire suitable for educational or commercial applications
- UGR<19 (unified glare rating) compliant luminaire ideal for most interior
- Selectable CCT between 3000K, 4000K and 6000K output
- Powder coated steel construction
- LED lifespan L80 B10 54,000 hours
- TP(a) as Standard

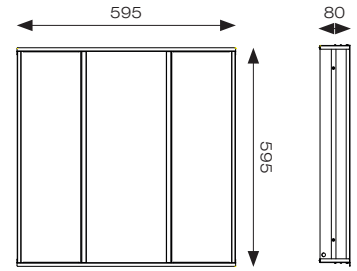

OCTO
Option Available

Powered by
CASAMBI



INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP
220-240V	50/60Hz	-20°C to 40°C	L80 B10 54,000	Ra 80	6	85°	2	IP20

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	UGR	TRADE
ALOTLED	600 x 600 - CCT Selectable	31W	3000K/4000K/6500K	3510lm (4000K)	117lm (4000K)	18	£106.00

*UGR Value based on (4H - 8H)

CODE (OPTIONS)	DESCRIPTION	TRADE	CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £90.00	/OCTO	OCTO Smart Control	+ £195.00
/SM3	Self-Test Emergency	+ £121.00	/DD	Digital Dimming (DD1/DD3/DD4)	+ £95.00
/DM3	DALI Emergency	+ £205.00			