

TORRE RING CCT

SLI003026CCT_PW



See
more


LED luminaire TORRE RING CCT with the possibility of changing the light color (CCT), with a power of 18 W, high light efficacy 111 lm/W. Thanks to the ability to change the color temperature (CCT) in the range from 3000K to 6000K, we can adjust the light color depending on our needs and preferences. It has a high IP54 rating, making it ideal for use in rooms with high humidity. The CCT function allows you to changes to the colour temperature of light (3000/4000/6000K). Narrow beam angle 30° gives directional light so that selected surfaces can be better exposed. Designed for surface mounting.

CCT**IP54**

Power	18 W	Voltage	230 V
Luminous flux*	2000 lm (360°)	Colour temperature	3000/4000/6000 K
Colour of light	CCT	Beam angle	30 °
Degree of protection (IP)	IP54		

Technical data

Code	SLI003026CCT_PW
Power	18 W
Nominal current	135 mA
Voltage	230 V
Energy consumption	18 kWh/1000h
Frequency	50HZ Hz
Protection class	II
Power factor	0,5
Useful luminous flux*	2000 lm (360°)
Luminous flux**	1400 lm (360°)
Lamp efficacy	111 lm/W
Colour temperature	3000/4000/6000 K
Colour of light	CCT
Beam angle	30 °
RA	80
Light source included	+
Dimmable	No
Working temperature range	-20/+40 °
Lifespan	17000 h
Housing material	Plastic
Degree of protection (IP)	IP54
Colour	Black
Dimension (AxBxC)	99x78x244 mm
For use	Inside/Outside
Assembly method	On the ceiling
Application	INT/EXT
Made in	PRC
Other	Light color change function 3000K/4000K/6000K ,

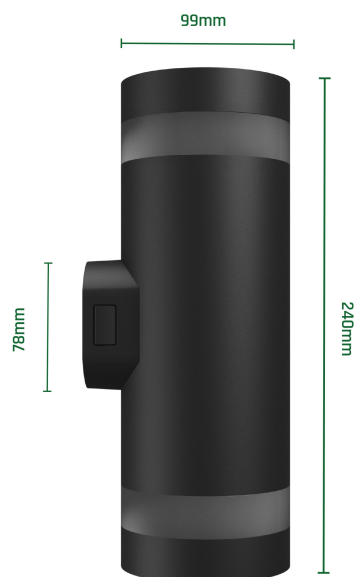

Related documents

[User manual](#)[Declaration of Conformity](#)[Photometric file](#)

