


Z LED Linear

- Powerful and durable surface mounted IP65 linear high bay, perfect for the demands of industrial applications
- Surface mounting possible with AZPLLED/LC accessory
- 1.5m Suspension kit supplied as standard
- Die-cast aluminium construction provides enhanced thermal performance for longer LED lifespan
- Plug and play microwave sensor option, offering maximum energy saving
- 0/1-10V dimmable as standard (installer must drill through pilot hole and use an IP rated gland on install)



Z LED LINEAR

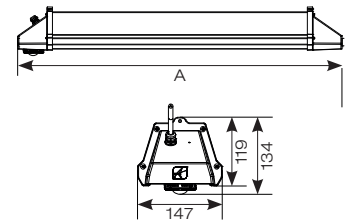

Suitable for surface mounting



Linkable connector for continuous mounting



Microwave Sensor

- IP65 Rated Enclosure.
- Up to 12M Mounting height ideal for low and high level applications.
- Detection Radius of 8M.
- Programmable by remote – options include, hold time, stand by dim level, daylight sensor and many more.

INPUT	HERTZ	TEMP	LIFETIME (HRS)	CRI	SDCM	BEAM ANGLE	CLASS	IP	IK
220-240V	50/60Hz	-30°C to 45°C	L80 54,000	Ra 80	4	110°	1	IP65	IK08

CODE	DESCRIPTION	WATTAGE	CCT	LUMENS	LM/W	A	TRADE
AZPLLED/1		100W		14000lm		658mm	£297.00
AZPLLED/2	Cool White	150W	5000K	21000lm	140lm	890mm	£371.00
AZPLLED/3		200W		28000lm		1122mm	£451.00

CODE (OPTIONS)	DESCRIPTION	TRADE
/M3	Emergency	+ £130.00
/DD	Digital Dimming (DD3)	+ £95.00
/OCTO	OCTO Smart Control	+ £195.00

CODE (ACCESSORIES)	DESCRIPTION	TRADE
AZPLLED/MWS	High Bay Plug-in Microwave sensor	£36.40
AZPLLED/LC	High Bay Linking Connector	£18.70
AZPLLED/MWSP	High Bay Microwave Sensor Programmer	£52.00