

# SLI028027NW\_PW\_AW


SLI028027NW\_PW\_AW



|                 |                        |                           |               |
|-----------------|------------------------|---------------------------|---------------|
| Power           | <b>75 W</b>            | Voltage                   | <b>230 V</b>  |
| Luminous flux*  | <b>13000 lm (360°)</b> | Colour temperature        | <b>4000 K</b> |
| Colour of light | <b>Neutral white</b>   | Beam angle                | <b>120 °</b>  |
| IK              | <b>10</b>              | Degree of protection (IP) | <b>IP65</b>   |


## Technical data

|                              |  |
|------------------------------|--|
| Code                         | SLI028027NW_PW_AW                          |
| Power                        | 75 W                                       |
| Nominal current              | 332 mA                                     |
| Voltage                      | 230 V                                      |
| Energy consumption           | 75 kWh/1000h                               |
| Frequency                    | 50HZ Hz                                    |
| Protection class             | I  |
| Power supply included        | +  |
| Power factor                 | 0.99                                       |
| Useful luminous flux*        | 13000 lm (360°)                            |
| Luminous flux**              | 11200 lm (360°)                            |
| Lamp efficacy                | 173 lm/W                                   |
| Luminous intensity           | 3600 cd                                    |
| Colour temperature           | 4000 K                                     |
| Colour of light              | Neutral white                              |
| Beam angle                   | 120 °                                      |
| RA                           | 80   |
| Uniformity of color SDCM max | 3  |
| Dimmable                     | No   |
| Working temperature range    | -25/+40 °                                  |
| Lifespan                     | 50000 h                                    |
| Housing material             | POLYCARBONATE                              |
| IK                           | 10   |
| Degree of protection (IP)    | IP65                                       |
| Colour                       | Gray/White                                 |
| Dimension (AxBxC)            | 1490x72x70 mm                              |
| For use                      | Inside/Outside                             |
| Assembly method              | On the ceiling, Suspended                  |
| Application                  | INT/EXT                                    |
| Made in                      | PRC  |
| Other                        | MAX 10 pcs per line,<br>emergency module , |

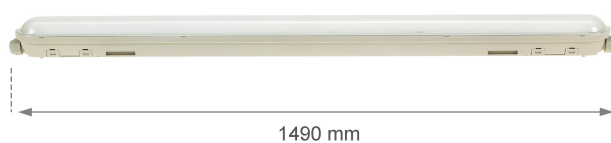

## Related documents



 Declaration of Conformity



 Photometric file

